



SEDAL GROUP  
Polígono Industrial Can Sunyer · C/Química, 2-12  
E-08740 Sant Andreu de la Barca (Barcelona) · Spain  
Tel. +34 93 680 33 00 · Fax +34 93 680 33 03  
sedal@sedal.com · www.sedal.com

# REVOLVING CARTRIDGES

## 25, 35 & 40mm RANGE

Revolving cartridges mix hot and cold water by rotating a metallic or plastic lever, delivering a fixed flow rate.




Get access to the complete and latest product technical data!



# FEATURES

## Revolving progressive movement

Revolving cartridges have a rotation angle from cold to hot to provide control of the water flow to the initial mixing point. Then the hot and cold water start mixing progressively. This smooth movement provides comfort operation to the user.

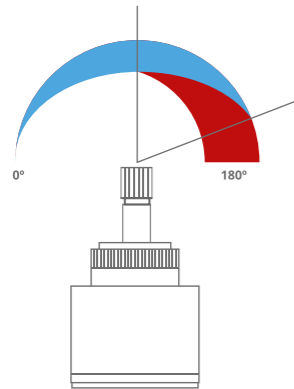


## 180° Rotation angle

All our revolving cartridges have a rotation angle of 180° from cold to hot for a more precise temperature control.

## Saving energy

The TR technology allows energy saving thanks to rotating limiters. It also enables anti-scalding safety feature, limiting maximum temperature in 7 selectable stops.

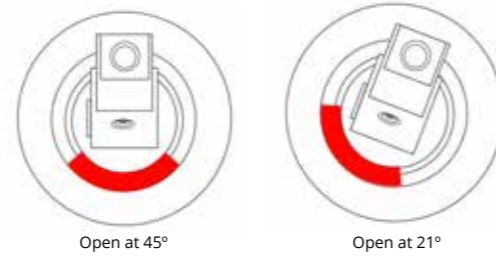

TEMPERATURE LIMITER FUNCTION

Position	15° l/min	65° l/min	°C 3bar
1	16	4	26°
2	12,5	7,5	35°
3	9	11	43°
4	5	15	50°
5	2	18	56°
6	1	19	61°
7	0	20	65°



# VERSIONS

## GI-25

These cartridges are specially conceived for slim and designer faucets, providing high performance while keeping a small footprint.



THE  
SMALLEST  
IN THE MARKET

## GI-35 & GI-40

Sedal offers a wide range of revolving 35mm and 40 mm cartridges with different versions to help with any manufacturers needs:

- with and without distributor (high-low base)
- with plastic lever
- with metal lever
- energy saving



## SC-35

In this revolving cartridge, the water is delivered through the center of the shaft for very specific designer applications..



WATER FLOWS  
THROUGH  
THE SHAFT

