

METERING VALVES


Metering valves are automatic shut-off valves for public venues ensuring water saving.



METERING VALVES

Metering valves

Metering valves are automatic shut-off valves for public venues ensuring water saving. All metering valves are available in M26 and M28 and have an auto-cleaning system to avoid lime scale.

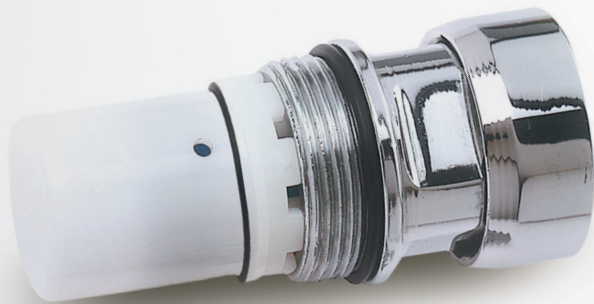

METERING VALVES FOR SHOWERS

M26
M28

METERING VALVES FOR BASINS

M26
M28

METERING VALVES FOR URINALS

M26
M28

Features



ECO
Environmental sustainability feature.



AUTOMATIC SHUT-OFF
Shuts off automatically after a limited period of time.



AUTO-CLEANING
Auto-cleaning system to avoid lime scale.

RECOMMENDED APPLICATIONS



SHOWERS
Recommended for public showers.



WASHBASINS
Specially designed for public basins.



URINALS
Recommended for public urinals.



PUBLIC VENUES
Suitable for airports, schools, libraries, etc.




HOTELS
Recommended for hotels.

TECHNICAL SPECIFICATIONS

SPECIFICATION	SHOWER	BASIN	URINAL
Max. working pressure	6 bar	6 bar	6 bar
Burst pressure	>25 bar	>25 bar	>25 bar
Lyfe cycle EN-816	210.000	210.000	210.000
Flow rate at 3 bar			
Free flow (DN13 hose)	17 l/min	17 l/min	17 l/min
C-Restrictor (DN13 hose)	14.5 l/min	14.5 l/min	14.5 l/min
Actuation time	20 ⁺¹⁰ ₋₅ s	15 ± 5 s	7 ± 3 s

Adjustable metering valves

Metering valves with automatic shut-off. The user can limit the time of use of the self-closing valve thanks to an adjustable system.

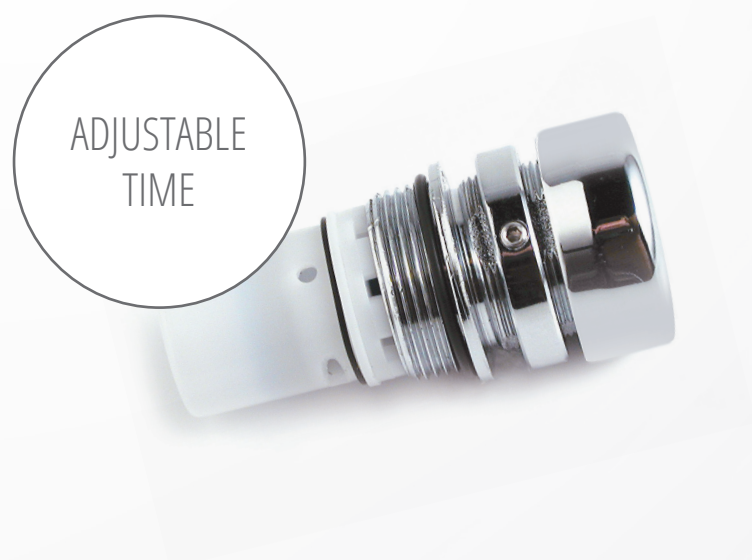

ADJUSTABLE METERING VALVES
FOR TAPS, SHOWERS & URINARY

M26
M28

Features



ECO
Environmental sustainability feature.



ADJUSTABLE
The user can limit the time of use of metering valve.



AUTOMATIC SHUT-OFF
Shuts off automatically after a limited period of time.

RECOMMENDED APPLICATIONS



SHOWERS
Recommended for public showers.



WASHBASINS
Specially designed for public basins.



URINALS
Recommended for public urinals.



PUBLIC VENUES
Suitable for airports, schools, libraries, etc.



HOTELS
Recommended for hotels.

TECHNICAL SPECIFICATIONS

SPECIFICATION	ADJUSTABLE
Max. working pressure	6 bar
Burst pressure	>25 bar
Lyfe cycle EN-816	210.000
Flow rate at 3 bar	
Free flow (DN13 hose)	17 l/min
C-Restrictor (DN13 hose)	14.5 l/min
Actuation time	30 ± 10 s



SEDAL GROUP

Polígono Industrial Can Sunyer · C/Química, 2-12
E-08740 Sant Andreu de la Barca (Barcelona) · Spain
Tel. +34 93 680 33 00 · Fax +34 93 680 33 03
sedal@sedal.com · www.sedal.com



Get access to the complete and
latest product technical data!