





Thermostatic cartridge TM001 C STD 07TM0112

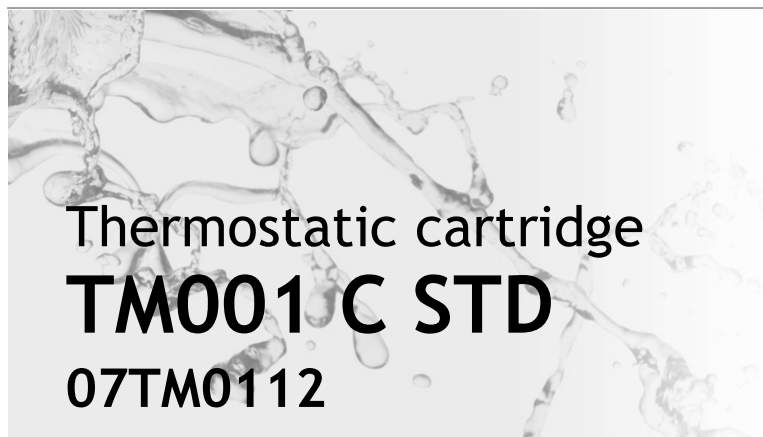


Technical specifications (*)

Standarts	EN-1111 ASSE#1016 GB QB/T2806-2006
Burst pressure	> 35 bar
Life cycle - (x2) EN 1111 ASSE#1016	100.000 cycles 1000,000 cycles
Max. Hot water temperature	90 °C
Max. turn angle for stopers	±170° angle (from 38°C in 0° angle position)
Smooth feeling movement	
Turn left-right	0,3 ÷ 0,5 Nm
Sensitivity (36-40° C)(handle 20 mm)	15 mm
Cold water supply failure test	Perfect cutting
Flow rate 3bar (Free)	26 l/min

Sensitivity curve


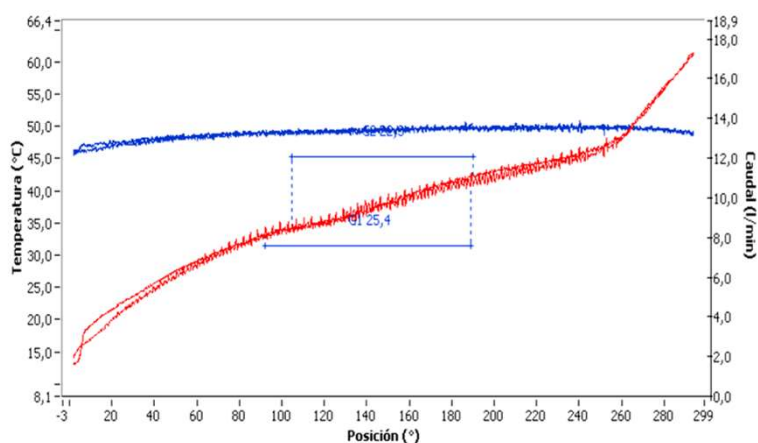


Flow rate curve

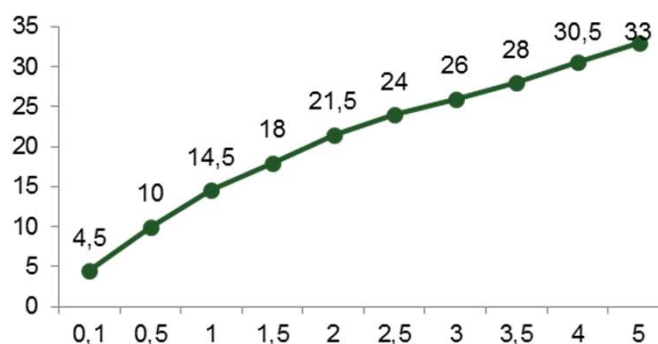


(*) Chequed with Sedal's faucet

Technical dimensions

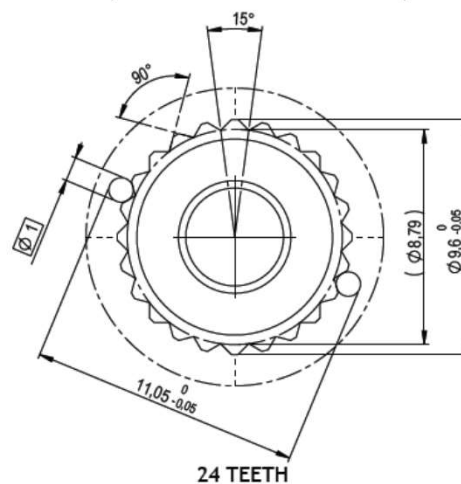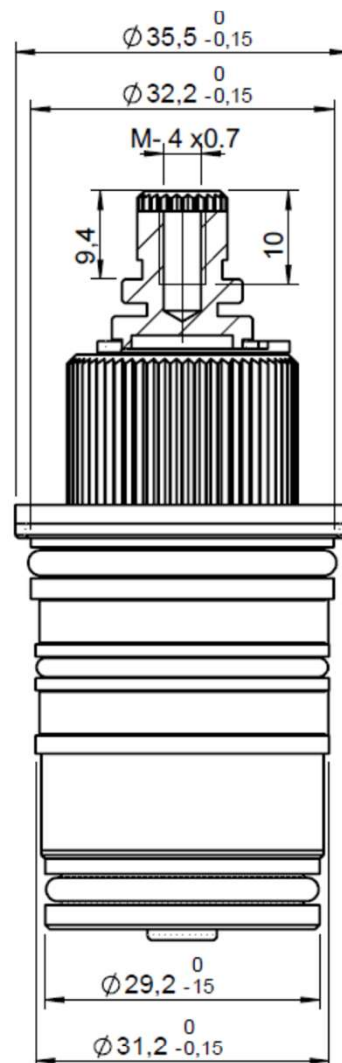


Thermostatic
cartridge
TM001 C STD


Machining tips

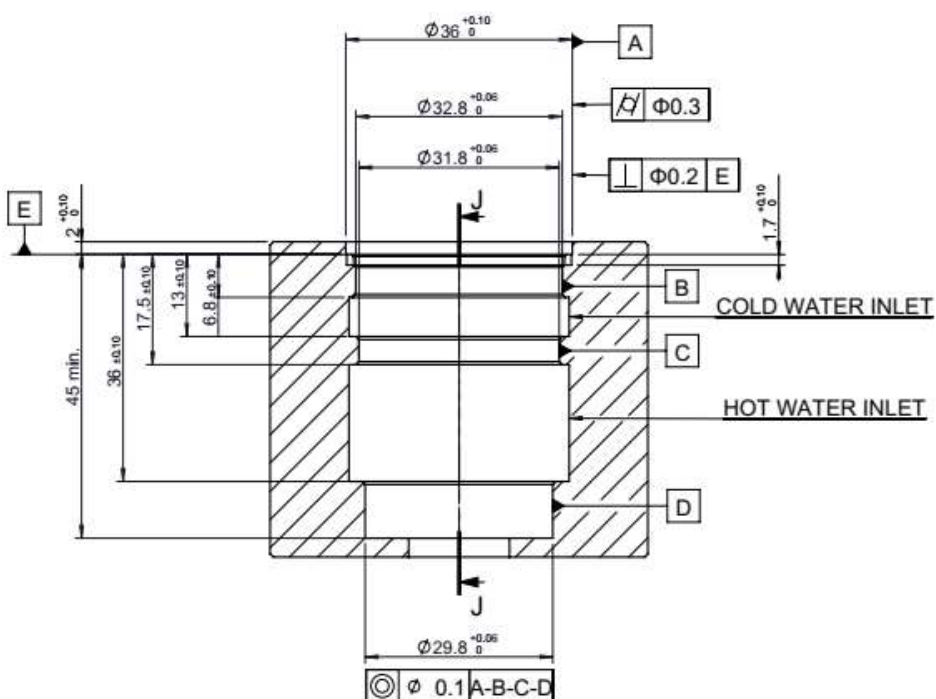

SECCIÓN E-E

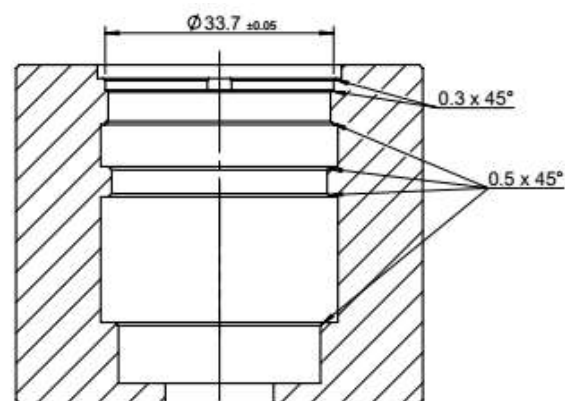

SECTION J-J

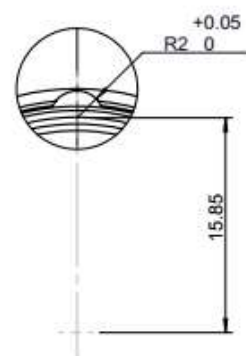

DETALLE H
ESCALA 2 : 1