





Thermostatic cartridge TM001 HP 4MS 07TM0118

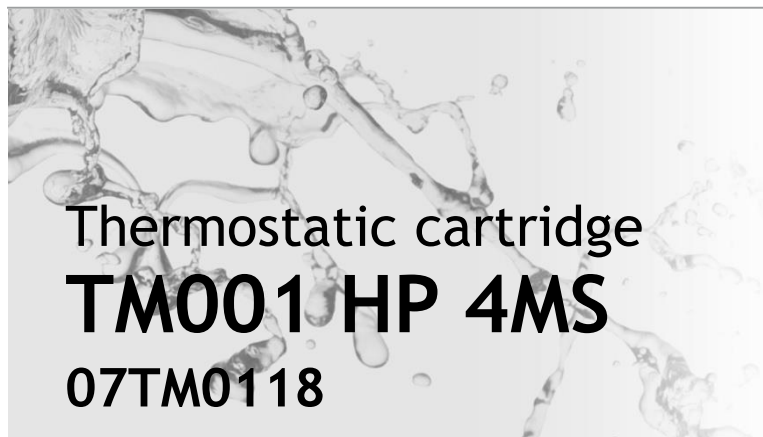


Technical specifications (*)

Sensitivity curve

Standarts	EN-1111 ASSE#1016
Burst pressure	>35 bar / 1 min
Life cycle - (x2) EN 1111	100.000 cycles
Life cycle - ASSE#1016	80.000 cycles
Max. Hot water temperature	90 °C
Max. Turn angle for stoppers (from 38°C in 0° angle position)	±170° angle
Noise level	18,80 ÷ 21,10 db
Smooth feeling movement	
Turn left-right	Max 0,35 Nm
Sensitivity (36-40°C) (handle R 20 mm)	14 mm
Cold water supply failure test	Perfect cutting
Flow rate (Free)	23 l/min at 3 bar

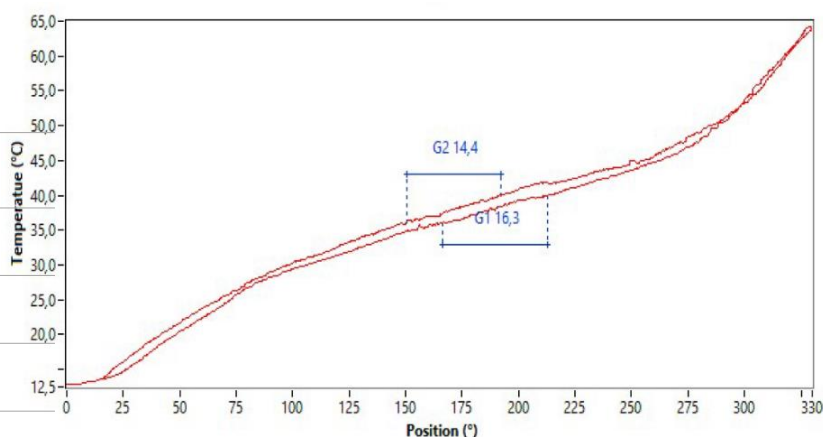





Flow rate curve

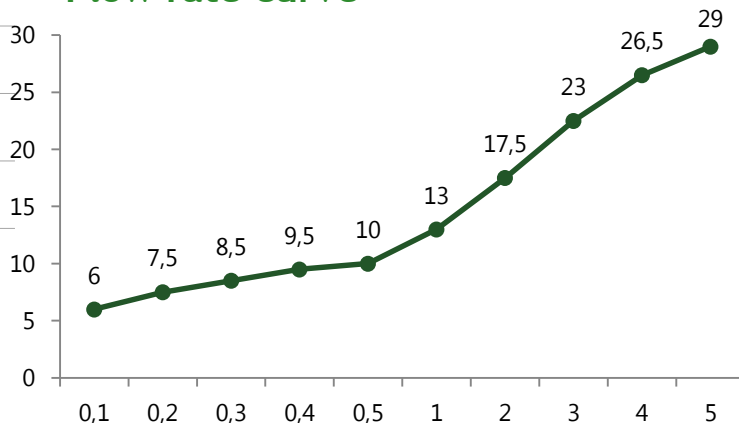

(*) Chequed with Sedal's faucet

Thermostatic
cartridge
TM001 HP 4MS

Technical dimensions

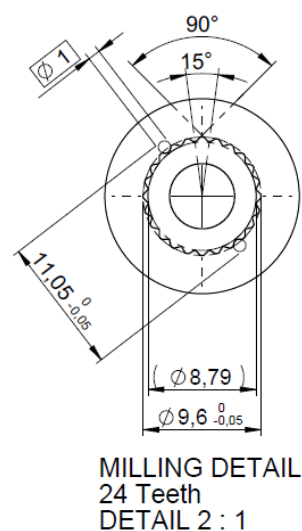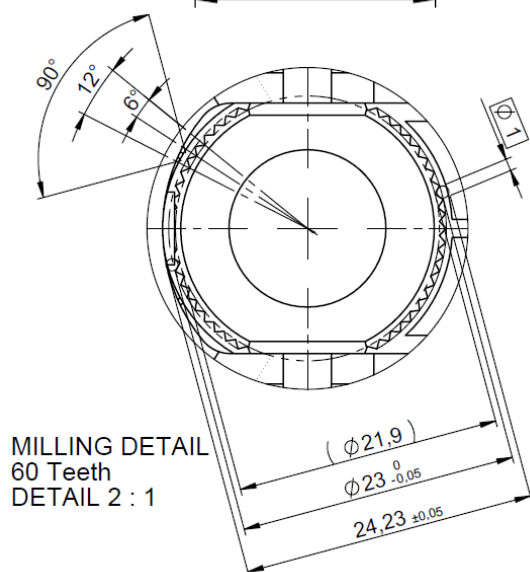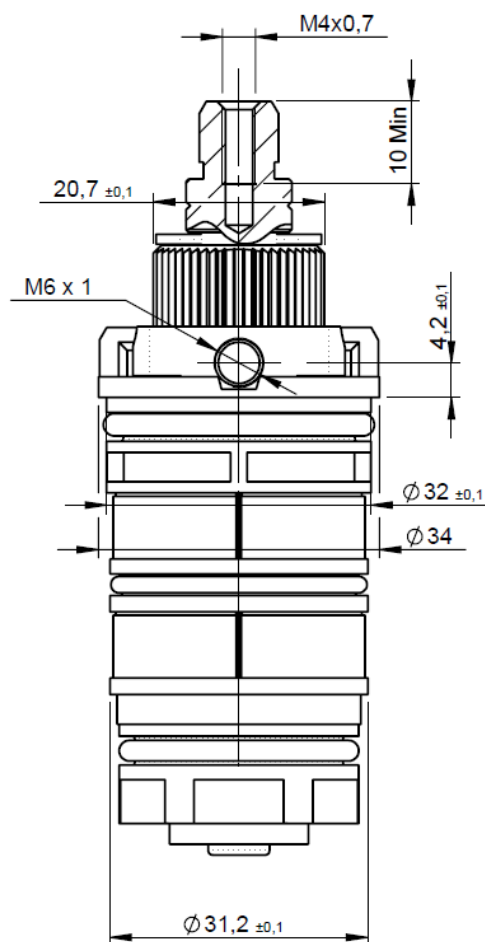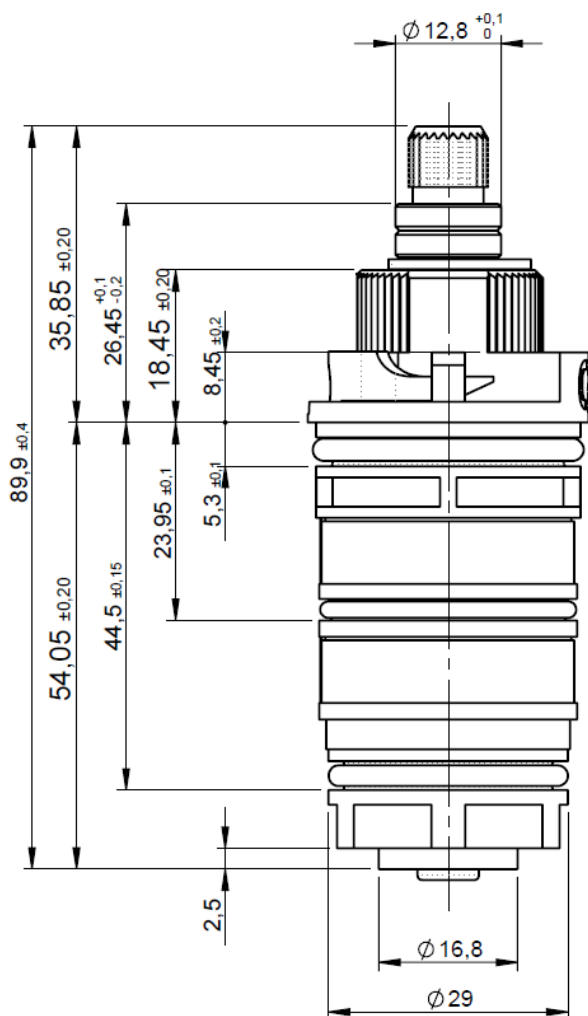

Thermostatic
cartridge
TM001 HP 4MS

Machining tips

