


Thermostatic cartridge TM001 C 4MS 07TM0121




Technical specifications

Standarts	EN-1111
Burst pressure	25 bar
Life cycle - (x2) EN 1111	100.000 cycles
Max. Hot water temperature	90 °C
Max.turn angle for stoppers	±170° angle (from 38°C in 0° angle position)
Smooth feeling movement	
Turn left-right	0,3 ÷ 0,5 Nm
SenSensitivity (36-40° C)(handle 20 mm)	15 mm
Cold water supply failure test	Perfect cutting
Flow rate 3bar (Free)	26 l/m

Sensitivity curve

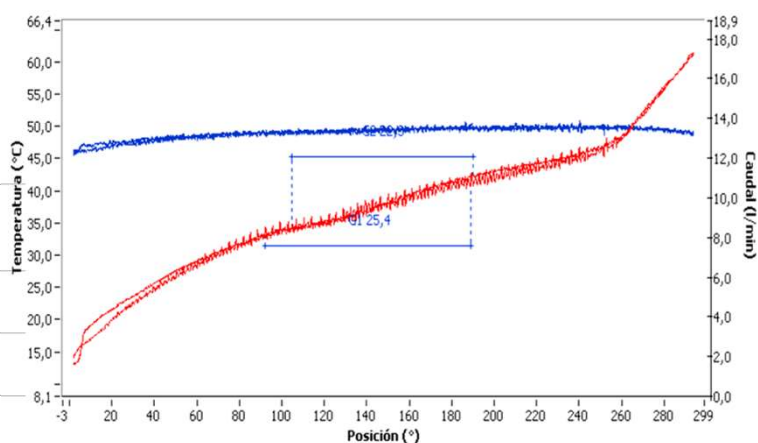





Flow rate curve

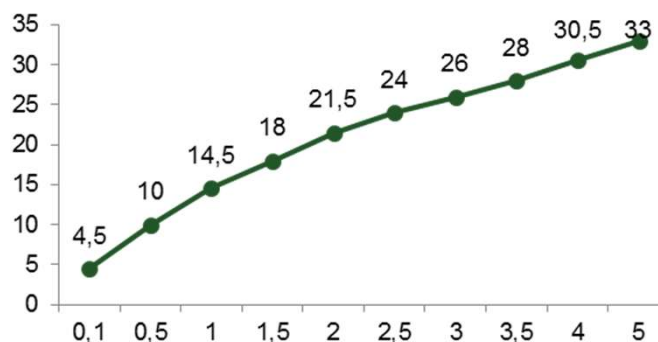

(*) Chequed with Sedal's faucet


Thermostatic
cartridge
TM001 C 4MS

Technical dimensions

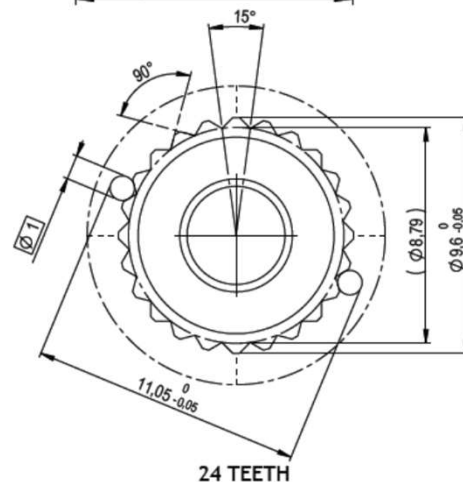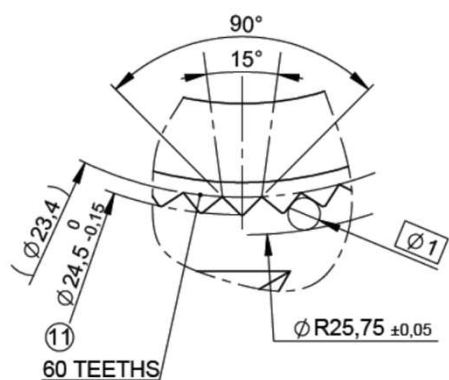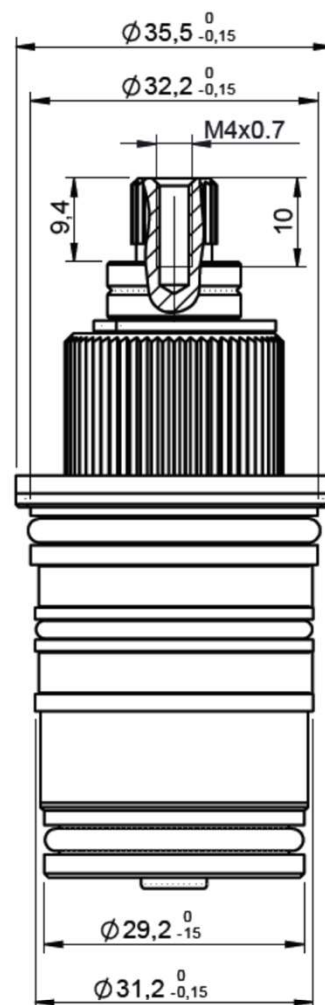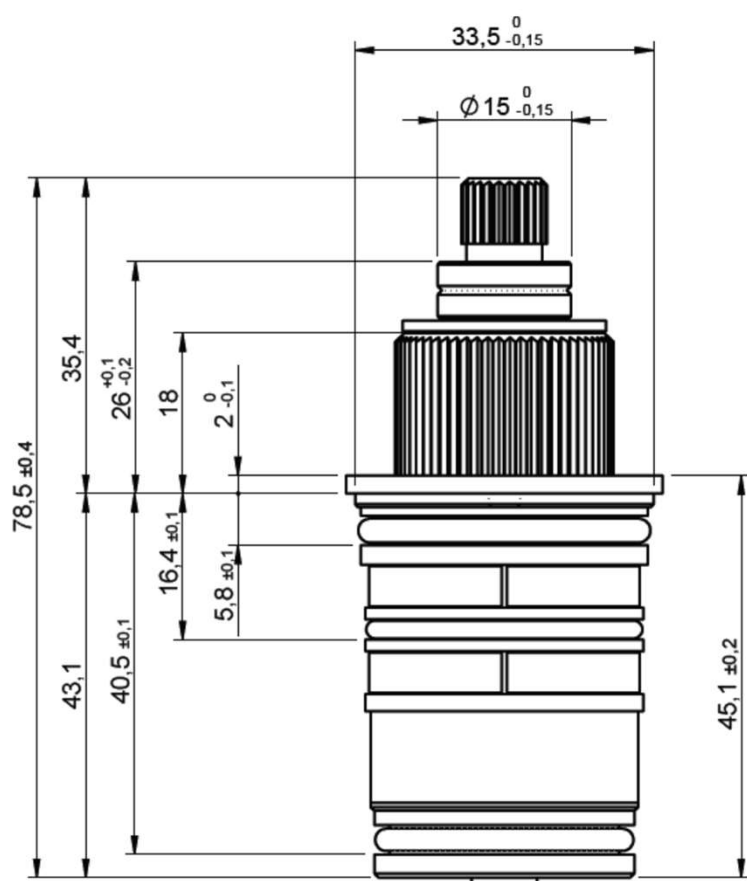


Thermostatic
cartridge
TM001 C 4MS


Machining tips

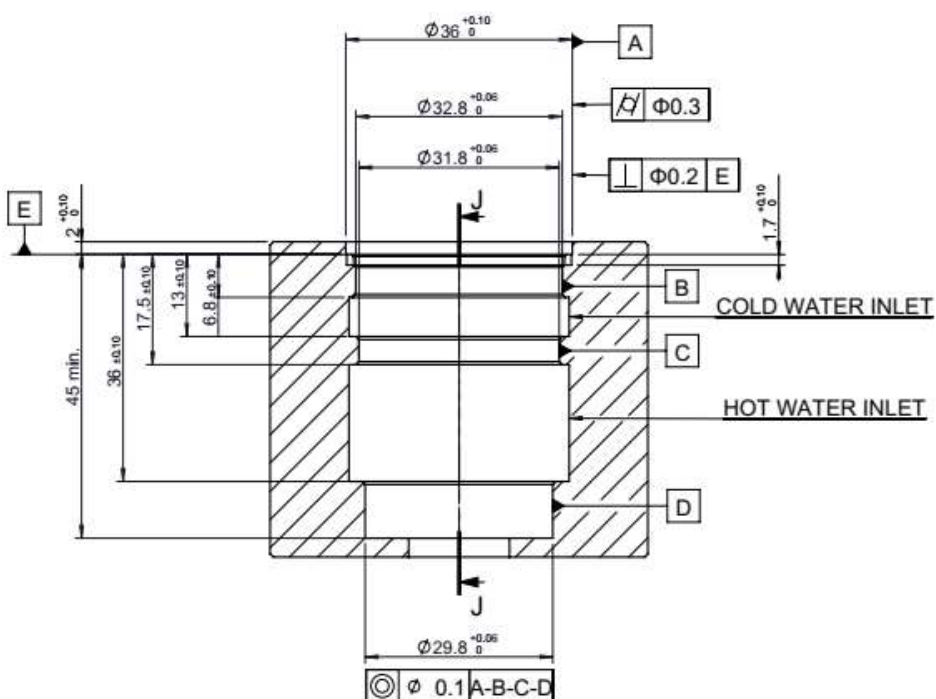

SECCIÓN E-E

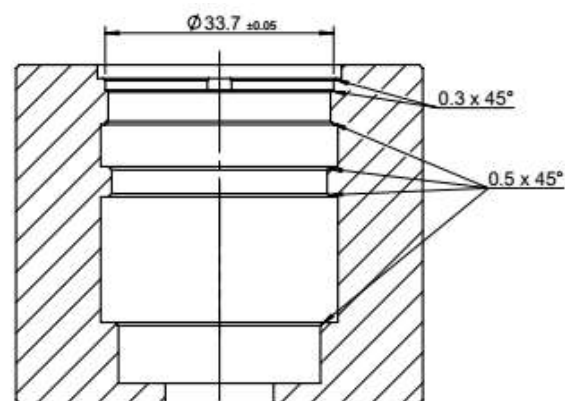

SECTION J-J

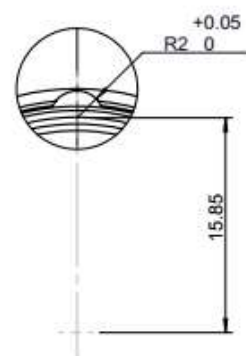

DETALLE H
ESCALA 2 : 1