




Thermostatic cartridge **TM001 LP 4MS** **07TM0131**

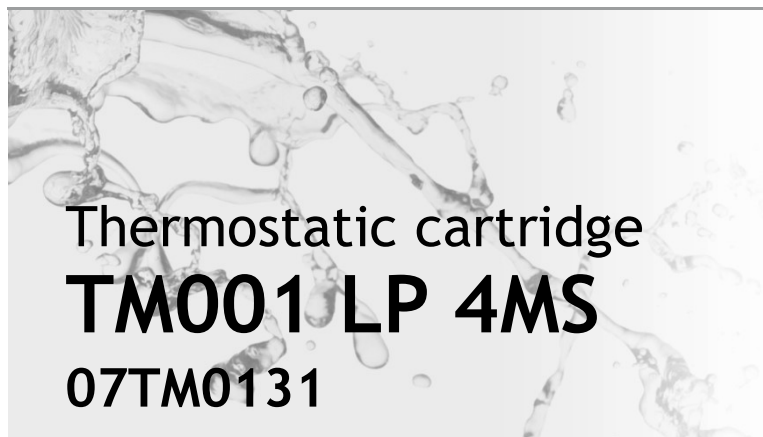


Technical specifications (*)

Standards	EN-1287
Burst pressure	>25 bar/min
Life cycle	EN-1287 50.000 cycles
Max. Hot water temperature	90 °C
Max. Turn angle for stoppers (from 38°C in 0° angle position)	±170° angle
Noise level	18,80 ÷ 21,10 db


Smooth feeling movement

Turn left-right	Max 0,35 Nm
Sensitivity (36-40°C) (handler R 20mm)	20 mm
Cold water supply failure test	Perfect cutting
Flow rate (free)	16 l/min at 0.6 bar
	34 l/min at 3 bar

Sensitivity curve

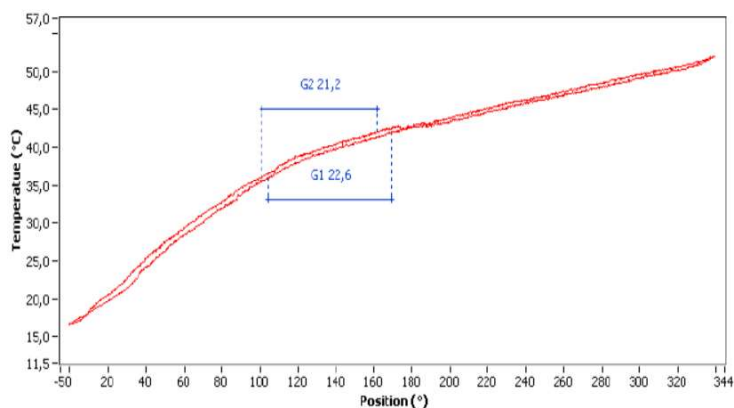

Flow rate curve

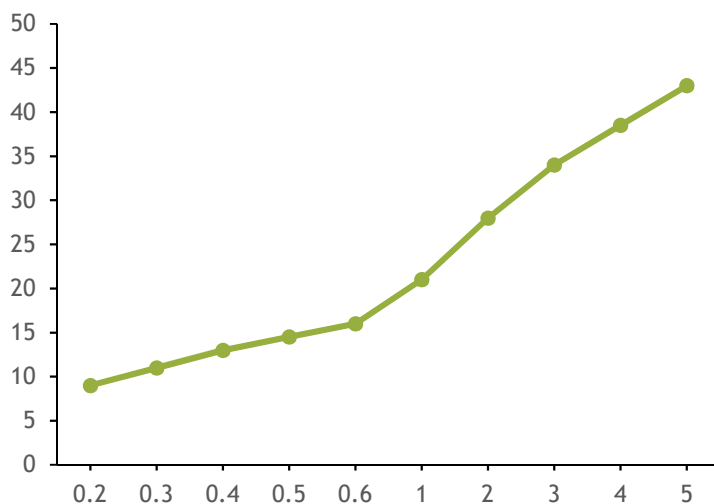


(*) Chequed with Sedal's faucet


Thermostatic cartridge

TM001 LP

Technical dimensions

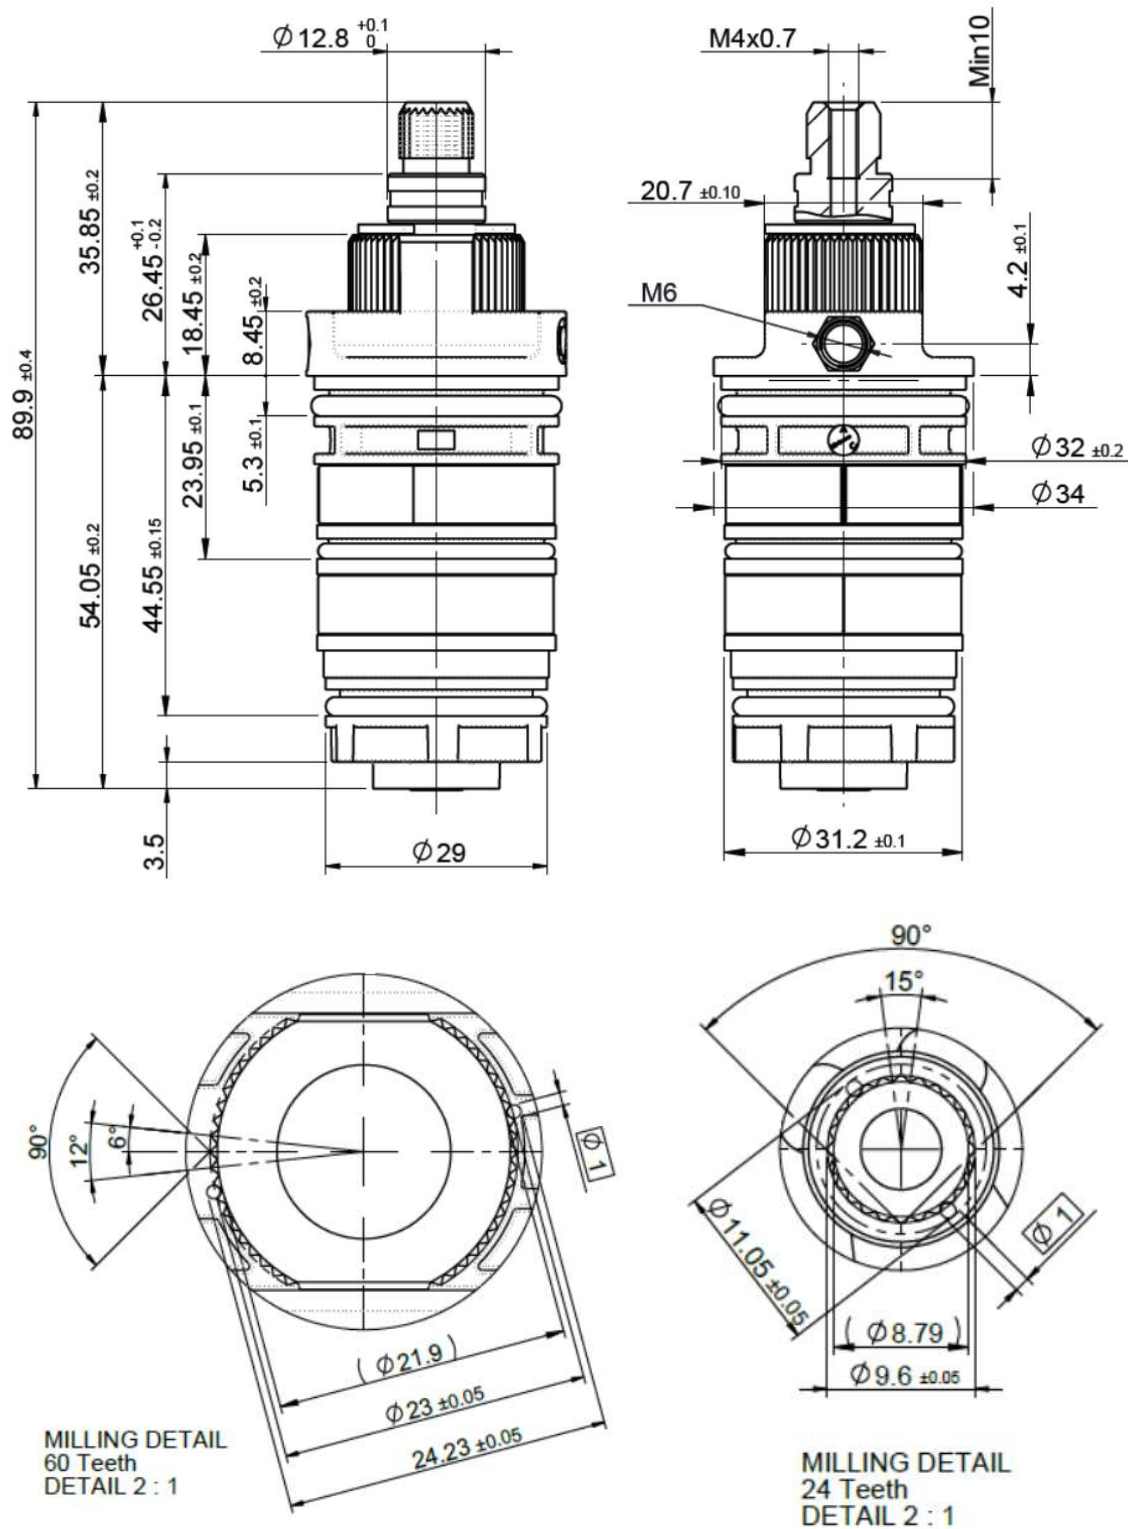

TM001 LP

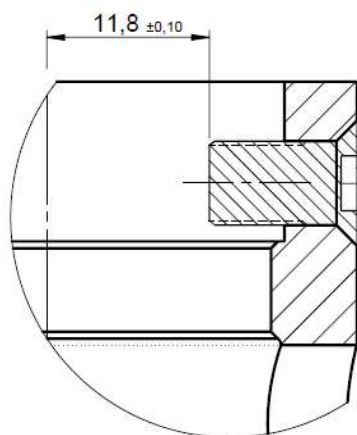[illegible]

shape of the screw head without specification but the stop between the screw and the body of the faucet is mandatory.