


Thermostatic cartridge TM001 BASIC QB 07TM0139




Technical specifications (*)

Standards	QB5418-2019
Burst pressure	>25 bar/min
Life cycle	30.000 cycles
Max. Hot water temperature	85 °C
Max. Turn angle for stopper (from 38°C to cold)	170° angle
Max. Turn angle for stopper ($\leq 49^\circ\text{C}$) (from 38°C to hot)	Max. 80° angle
Noise level	18,80 ÷ 21,10 db
Smooth feeling movement	
Turn left-right	Max 0,35 Nm
Sensitivity (36-40°C) (handler R 20mm)	14 mm
Cold water supply failure test	Perfect cutting
Hot water supply failure test	<250 ml (in 5s)
Flow rate (free)	13 l/min at 1 bar
	23 l/min at 3 bar

Sensitivity curve

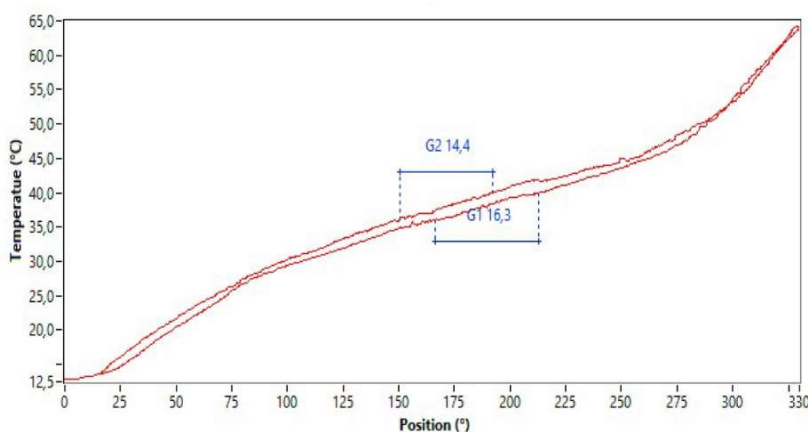

Flow rate curve

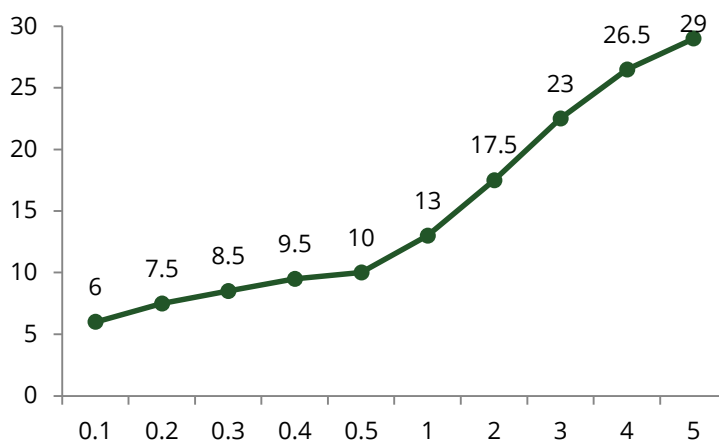

(*) Chequed with Sedal's faucet

Thermostatic cartridge

TM001 BASIC

Technical dimensions

