





(*) Technical specifications

Nut torque/Pich M1,5	8 ÷ 10 Nm
Standards	EN-1111 ASSE#1016 GB QB/T2806
Burst pressure	>35 bar/ 1 min
Life cycle - (x2) EN 1111	100 000 cycles
Life cycle - ASSE 1016	100 000 cycles
Max. Hot water temperature	90 °C
Max. turn angle for stoppers	±170° angle (from 38°C in 0° angle position)
Outlet temperature lower than 49°C	Max. Turn angle from 38°C: 80°
Noise level (flow)	17,80 ÷ 20,10 dB
Smooth feeling movement	
Turn left-right	0.03 ÷ 0.18 Nm
Sensitivity (36-40°C) (handle 20 mm)	27-31mm
Water hammer	100 cycles 8bar / 50bar
Cold water supply failure test	Perfect cutting
Flow rate (free)	21 l/min at 3 bar

Sensitivity curve

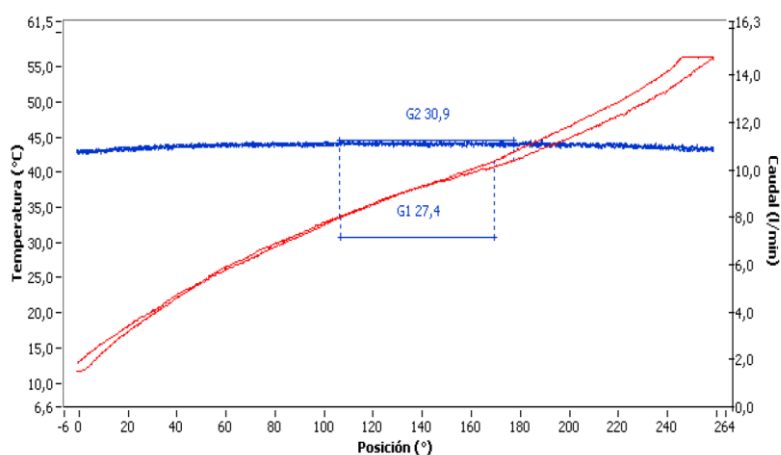


Flow rate curve

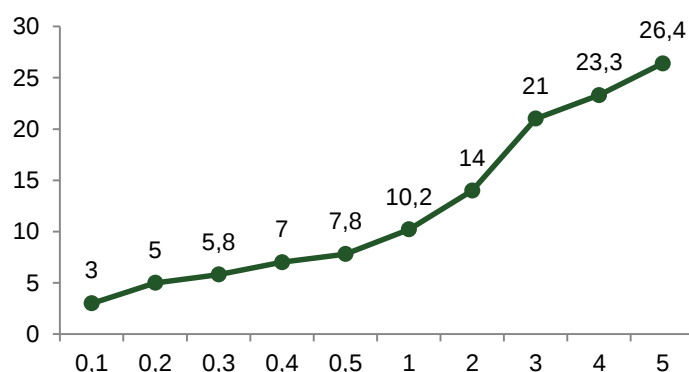

(*) Checked with Sedal's laboratory faucet

Thermostatic
cartridge
TM006 with click

Technical dimensions (2)

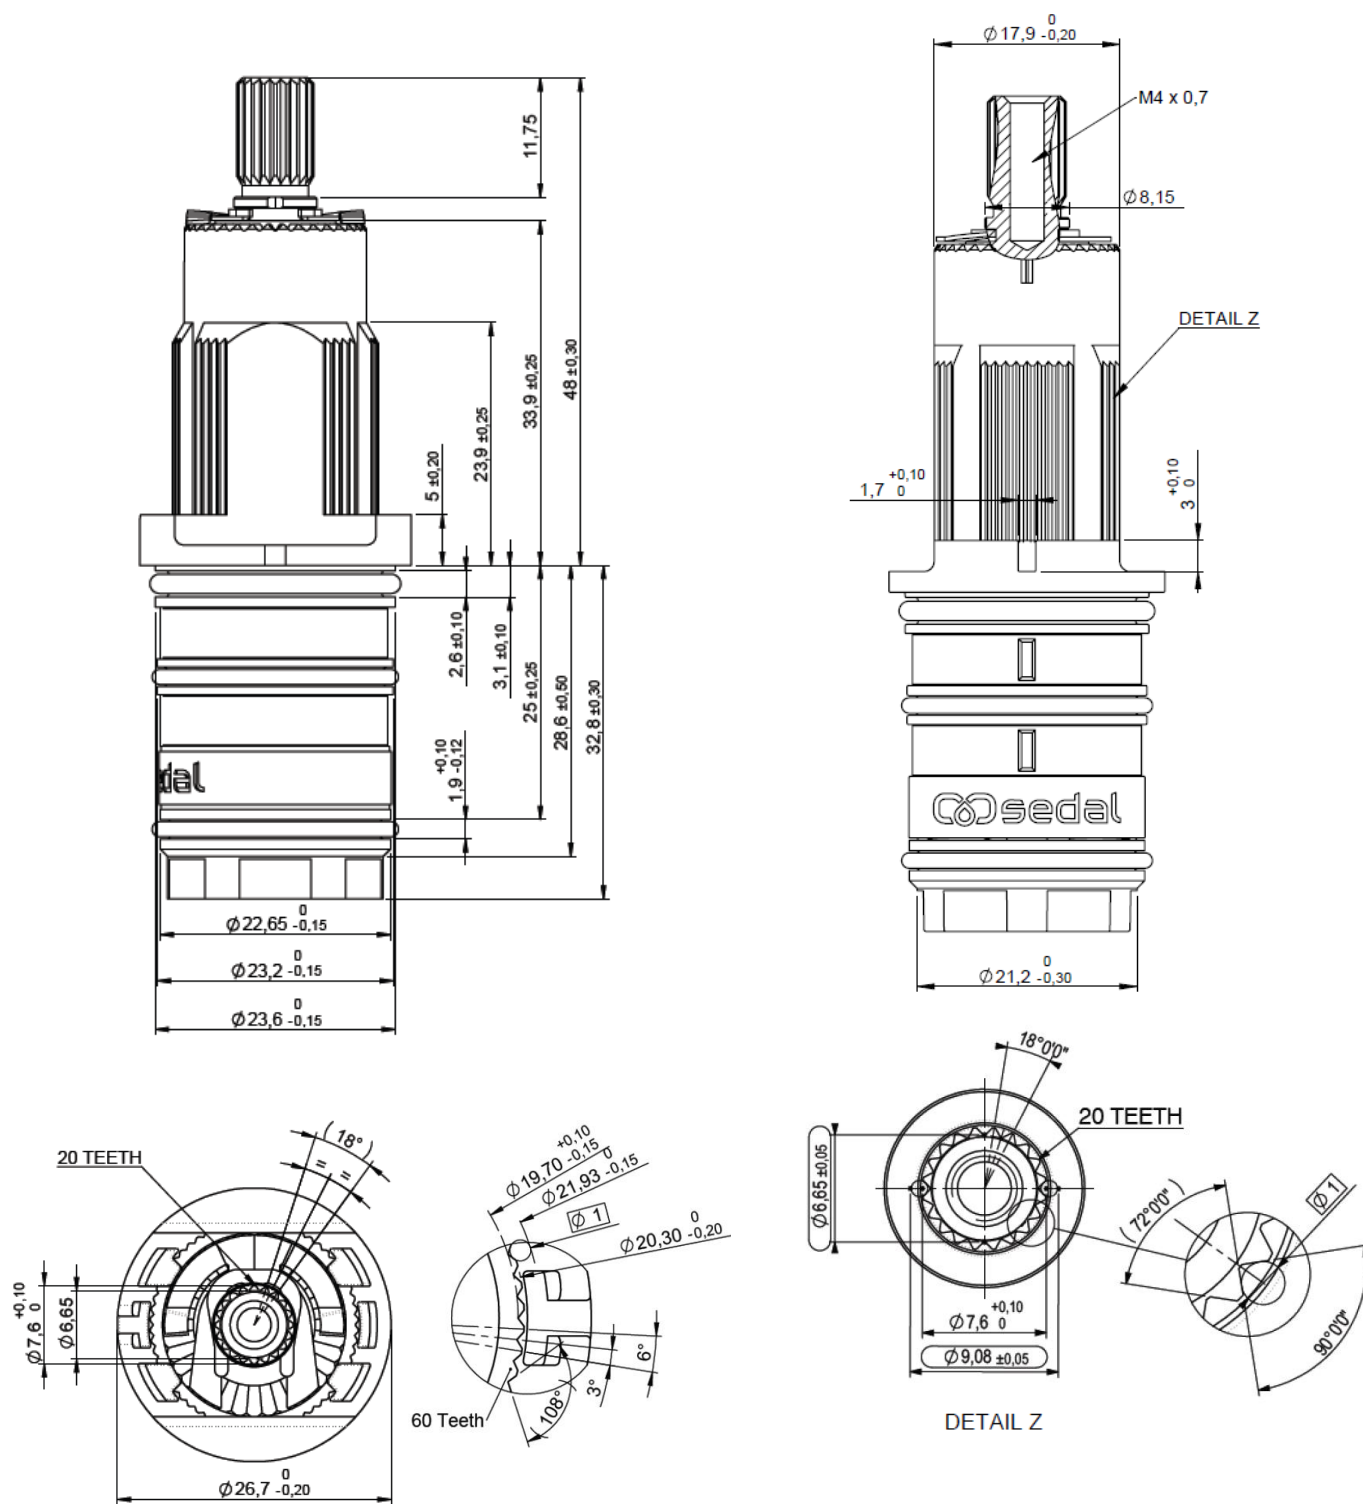

Thermostatic
cartridge
TM006 with click

Machining prescription

