


Thermostatic cartridge **TM006 STD QB** **07TM0614**




(*) Technical specifications

Nut torque/Pich M1,5	8 ÷ 10 Nm
Standards	QB/T5418
Burst pressure	>25 bar/ 1 min
Life cycle - QB/T5418-2019	30,000 cycles (x2)
Max. Hot water temperature	90 °C
Max. turn angle for Cold water	Max. 170°
Max. Turn angle for Hot water (≤ 49°C)	Max. 80°
Noise level	17,80 ÷ 20,10 db
Smooth feeling movement	
Turn left-right	0.03 ÷ 0.18 Nm
Sensitivity (36-40°C) (handle 20 mm)	18 mm
Cold water supply failure test	Perfect cutting
Flow rate (free)	10 l/min at 1 bar

Sensitivity curve

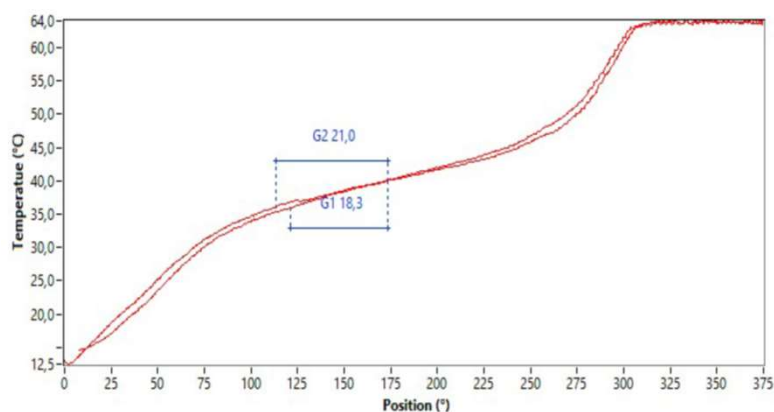

Flow rate curve

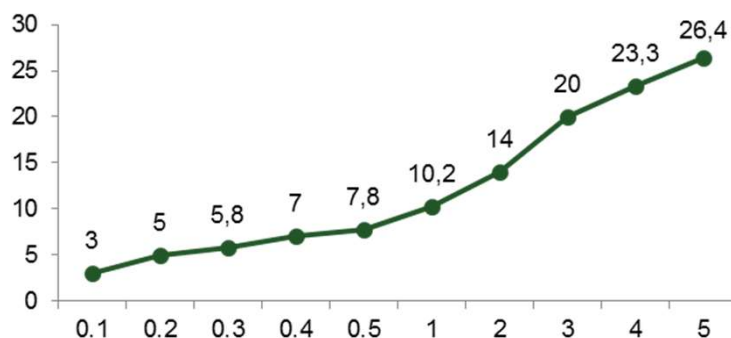


(*) Measured with Sedal's faucet

Thermostatic cartridge

TM006 STD QB

Technical dimensions

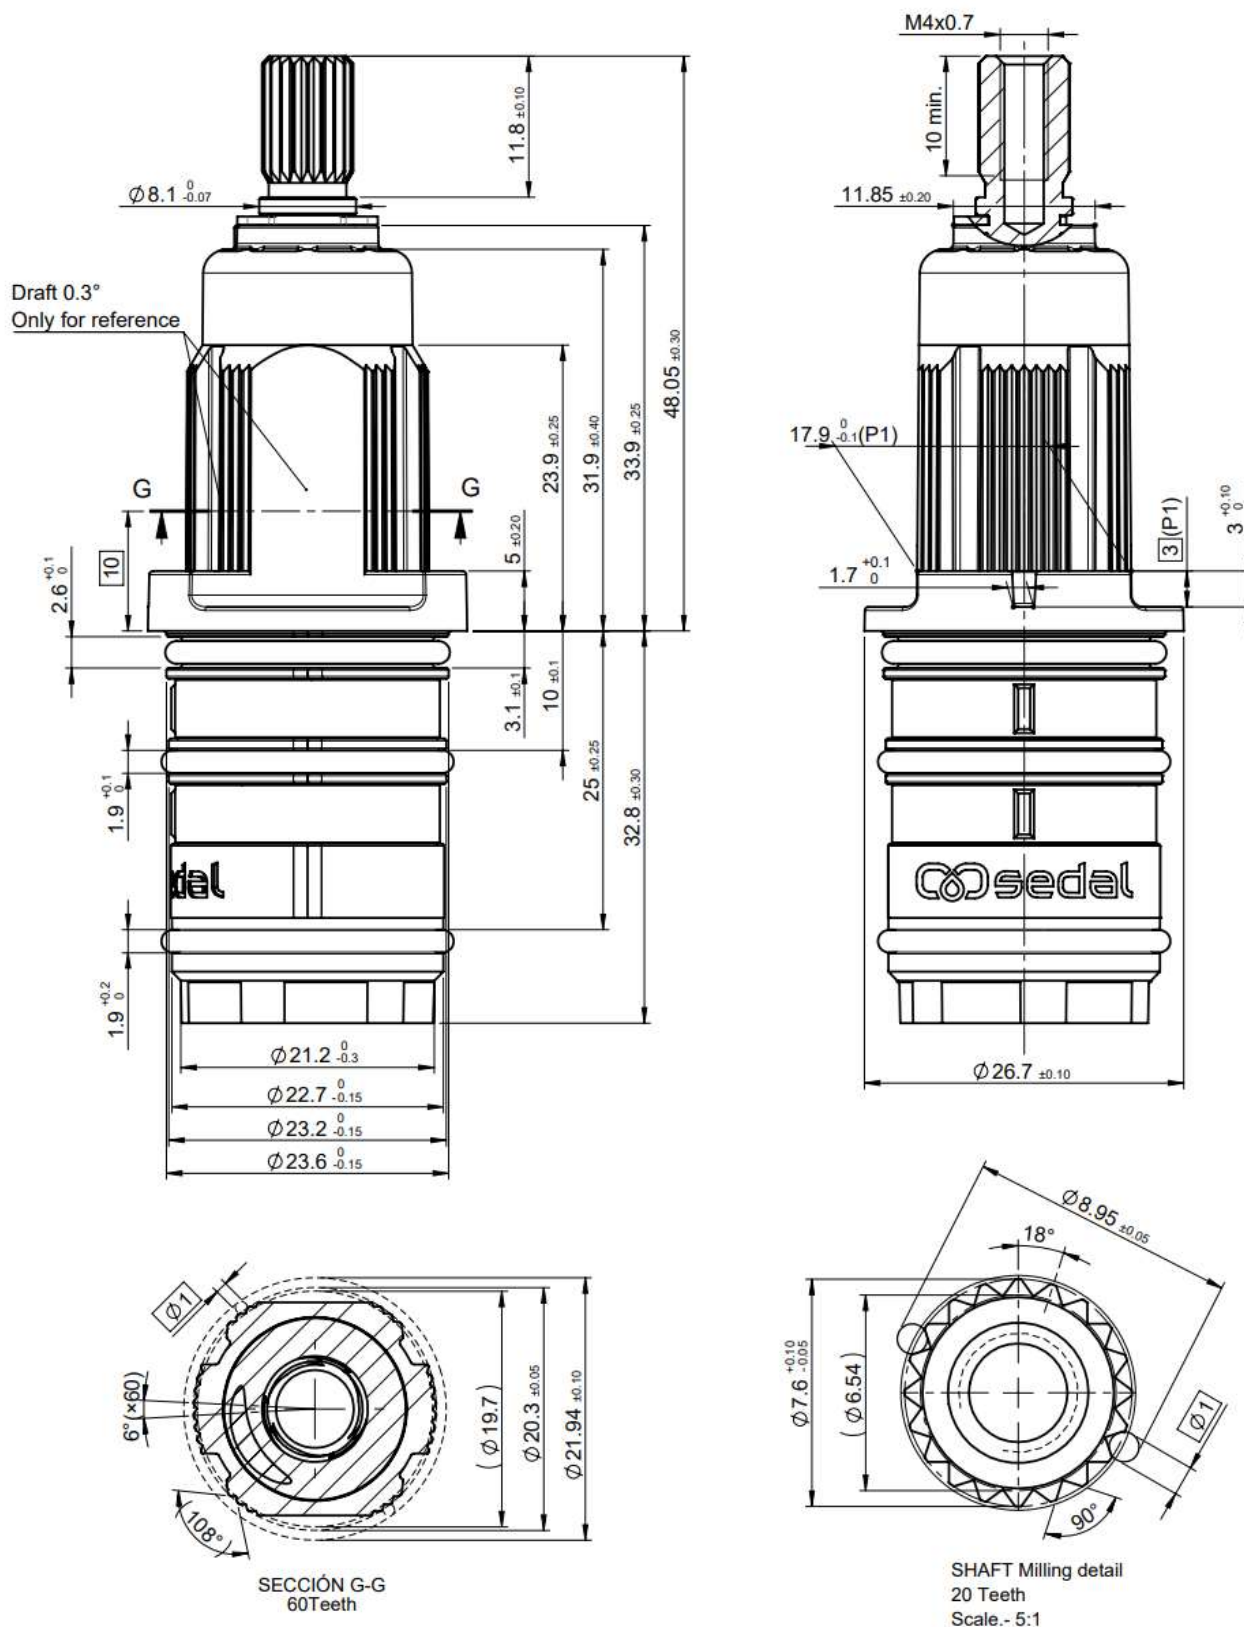

Thermostatic cartridge

TM006 STD QB

Machining prescription

