

**TM006
4MS**

Thermostatic cartridge

07TM0619




(*) Technical specifications

Nut torque/Pich M1,5	8 ÷ 10 Nm
Standards	EN / 1111
Burst pressure	>25 bar/ 1 min
Life cycle - (x2)EN-1111	100000 cycles
Max. Hot water	90 °C
Max. turn angle for stoppers	±170° angle (from 38°C in 0° angle position)
Noise level ⁽¹⁾	17,80 ÷ 21,10 db


Smooth feeling movement

Turn left-right	0.03 ÷ 0.18 Nm
Sensitivity (36-40°C) (handle 20 mm)	27÷31 mm
Water hammer	100 cycles 8bar / 50bar
Cold water supply failure test	Perfect cutting
Flow rate (free)	21 l/min at 3 bar

Sensitivity curve ⁽¹⁾

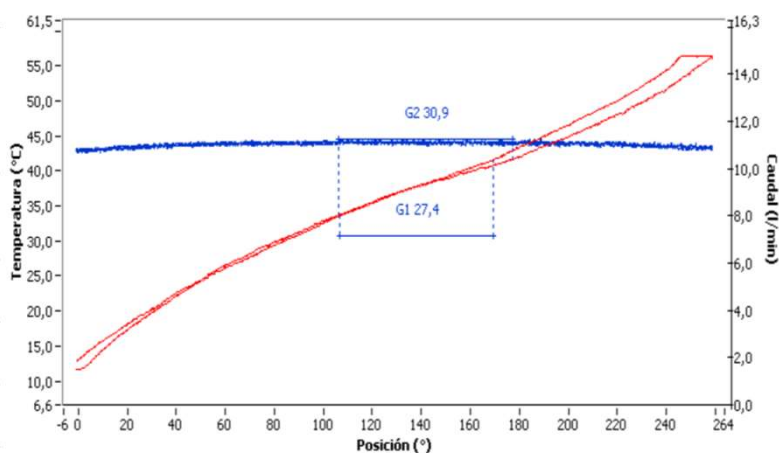


Flow rate curve ⁽¹⁾

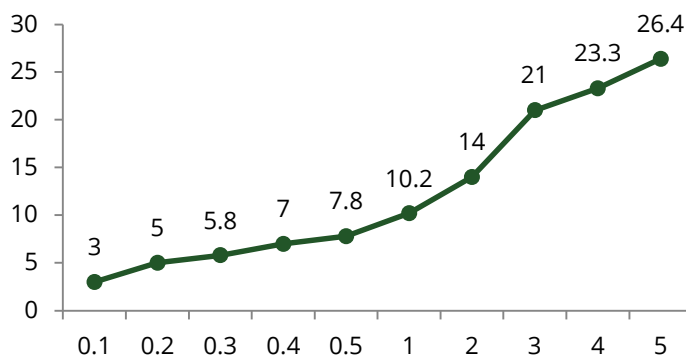

^(*) Checked with Sedal's laboratory faucet

Thermostatic
cartridge
TM006
4MS

Technical dimensions (2)

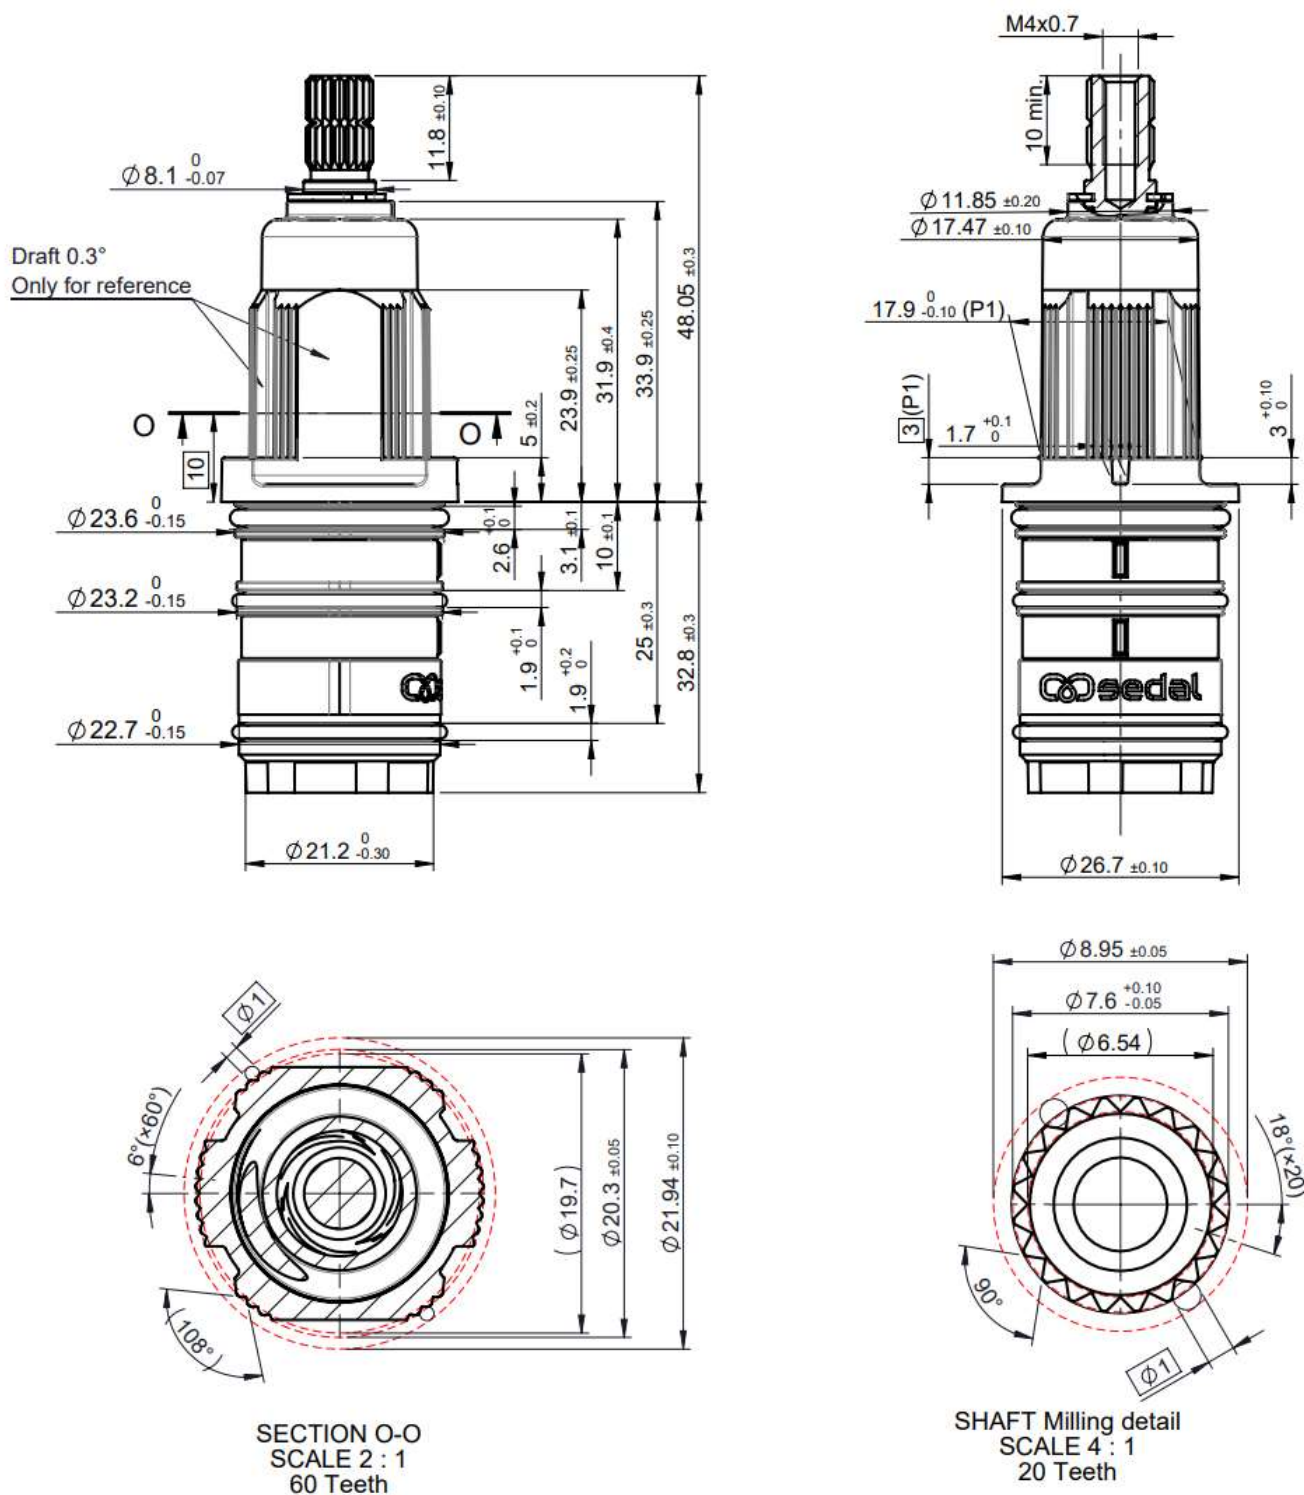

(2) Dimensions of the cartridge assembled into the faucet (without vertical gap between the cover and the base)

Thermostatic
cartridge
TM006
4MS

Machining prescription

