


EN-35 S/D TR DUE TOP C2 Shower Application

Single lever cartridge
Standard 35mm


08EN35S3506




Technical specifications

Nut torque/Pitch M1,5	10-12 Nm
Opening angle	23°
Rotation angle	100°
Working pressure (recommended)	1- 5 bar
Burst pressure	>50 bar
Life cycle	EN 817/NF077 U3 3 x ASME 112.18.1 M 3 x GB18145
	175.000 cycles 1.500.000 cycles 210.000 cycles
Sensitivity (r = 45 mm) ⁽²⁾	>12°
Fidelity ⁽²⁾	<5°
Constant 63°C & 50°C (6 l/min & 3 l/min) ⁽²⁾	<4°C - <6°C
Max. Hot water recommended	60 - 65°C
Max. Hot water	90°C
Flow rate at 3 bar ⁽²⁾	
Free flow	27,40 l/min
A-Restrictor - Shower	12,60 l/min
Noise (NF077) - Rh-A, 3 bar	Group I ⁽²⁾
Water saving (DUE)	EN817 / NF077
Operation Torque	
Open - close	0,20 ÷ 0,40 Nm
Left-Right	0,20 ÷ 0,40 Nm

Free flow (2)

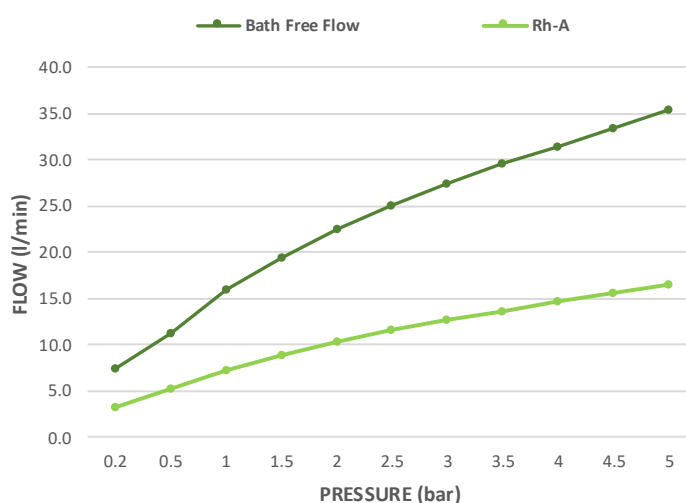

Sensitivity (at 3bar) (2)

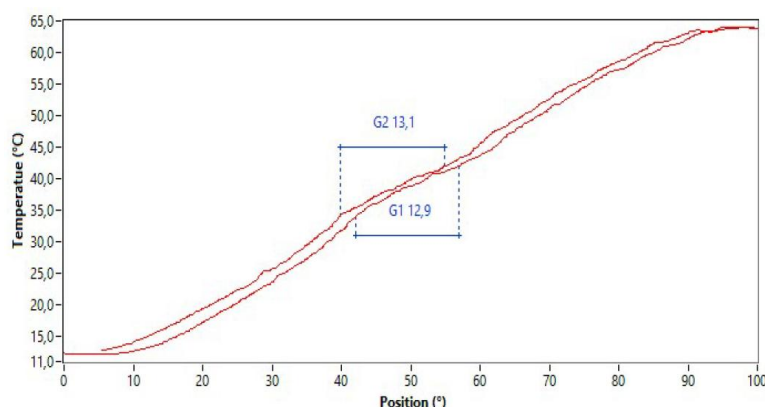


(1) The prescribed tightening torque is related to faucet body and nut both in brass material, pitch 1,5mm and no lubricant applied on the threads. For other faucet body - nut material combinations please contact SEDAL.


(2) Measured with SEDAL faucet.

Single lever cartridge
Standard 35mm
EN-35 S/D TR DUE TOP C2 Shower Application

Technical dimensions ⁽³⁾

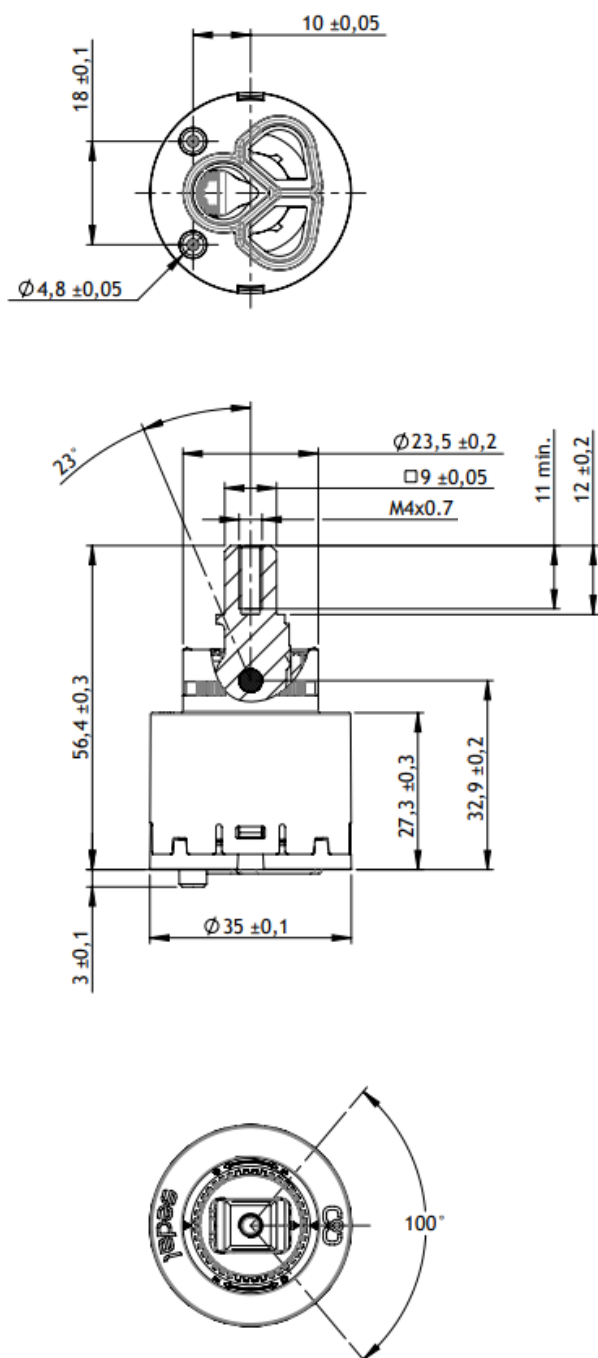

Machining prescription ⁽⁴⁾

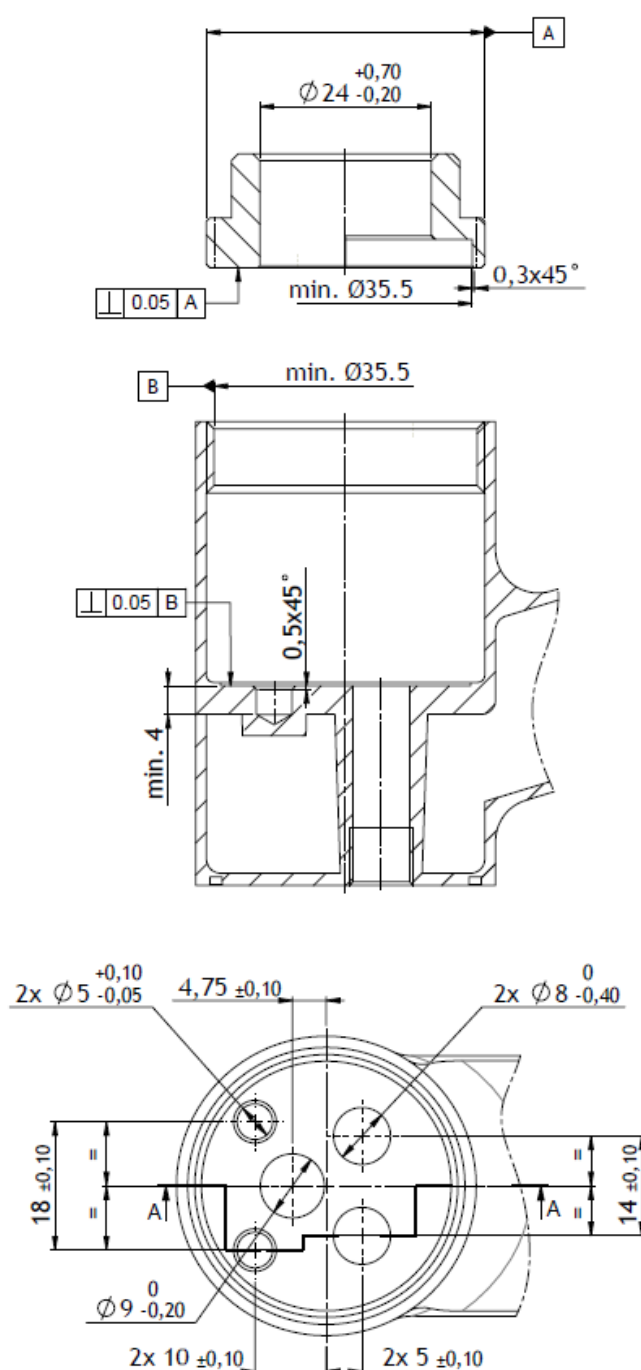

(3) Dimensions of the cartridge assembled into the faucet (without vertical gap between the cover and the base)

(4) Sealing surfaces must be free of burrs and sharp areas. The faucet body must be free of debris