


EN-35 S/D TOP COLD TR DUE C3

Single lever cartridge
Standard 35mm


08EN35S5002

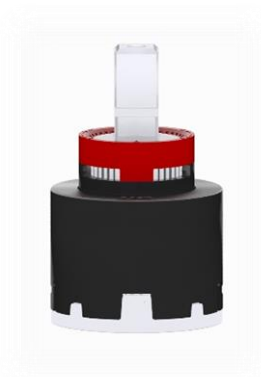


Technical specifications

Nut torque/Pitch M1,5	10-12 Nm
Opening angle	23°
Rotation angle	93°
Working pressure (recommended)	1- 5 bar
Burst pressure	>50 bar
Life cycle	EN 817/NF077 U3 3 x ASME 112.18.1 M 3 x GB18145
	175.000 cycles 1.500.000 cycles 210.000 cycles
Sensitivity (r = 45 mm) ⁽²⁾	>12°
Fidelity ⁽²⁾	<5°
Max. Hot water recommended	60 - 65°C
Max. Hot water	90°C
Flow rate at 3 bar ⁽²⁾	
Free flow	27,40 l/min
A-Restrictor - Shower	12,60 l/min
Noise (NF077) - Rh-A, 3 bar	Group I ⁽²⁾
Water saving (DUE)	EN817 NF077
Operation Torque	
Open - close	0,20 ÷ 0,40 Nm
Left-Right	0,20 ÷ 0,40 Nm

Flow rate at MIX⁽²⁾

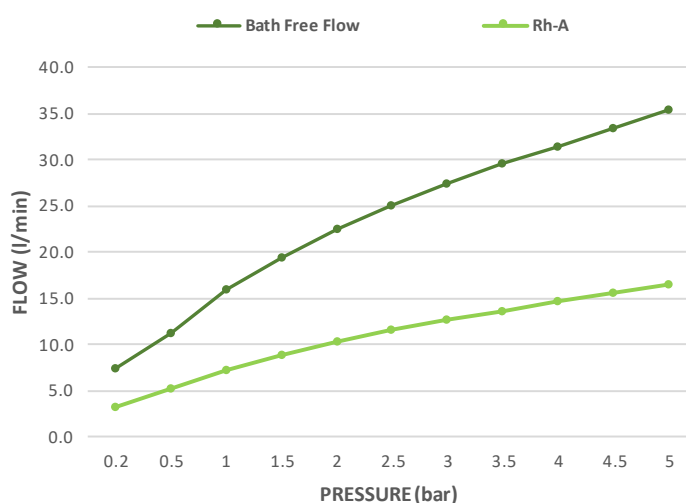




Sensitivity (at 3bar) ⁽²⁾

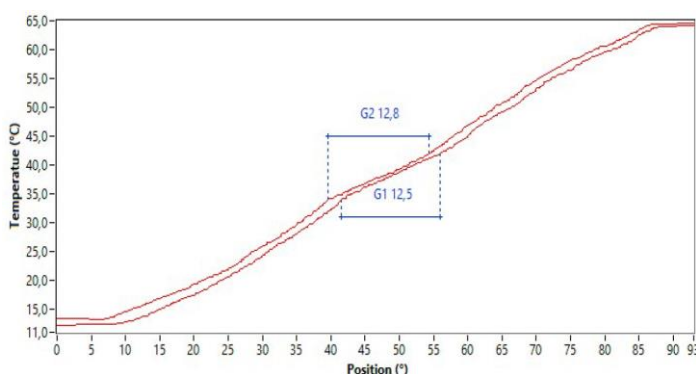

(1) The prescribed tightening torque is related to faucet body and nut both in brass material, pitch 1,5mm and no lubricant applied on the threads. For other faucet body - nut material combinations please contact SEDAL.

(2) Measured with SEDAL faucet.

Machining prescription⁽⁴⁾

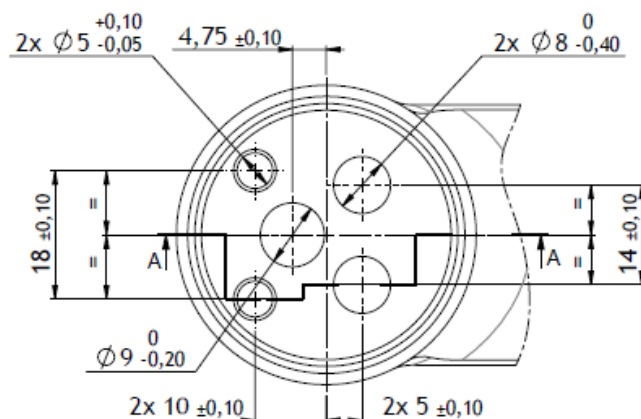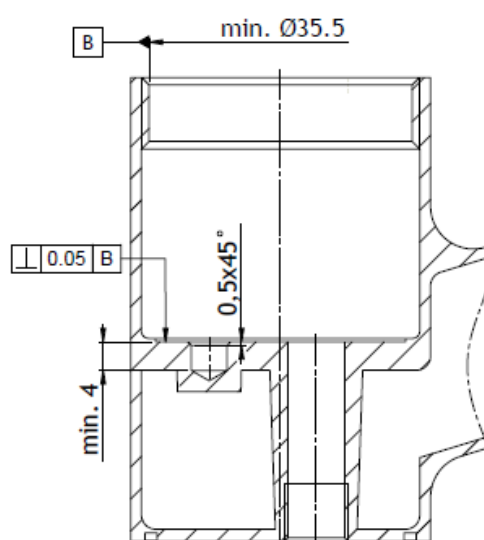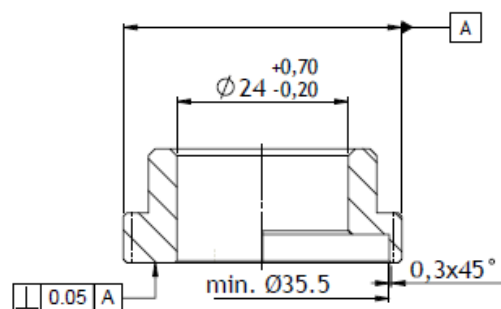

(4) Sealing surfaces must be free of burrs and sharp areas. The faucet body must be free of debris.