


EN-40 C/D C1 NF

EN-40 C/D C2 NF

Single lever cartridge
Standard 40 mm

08EN40L1002


08EN40L3005

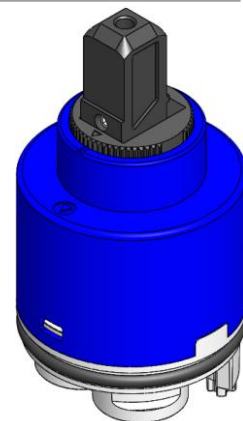


Technical specifications

Prescribed tightening torque ⁽¹⁾	10 - 12 N·m
Opening angle	25°
Rotation angle	110°
Working pressure (recommended)	1- 5 bar
Burst pressure	> 50 bar
Water hammer test	ECAU NF 077
Life cycle	NF-077 (U3)
	175.000 cycles
Sensitivity (r= 54 mm) ⁽²⁾	> 12 mm
Fidelity ⁽²⁾	< 5°
Constant 63°C & 50°C (6 l/m & 3 l/m) ⁽²⁾	< 4°C - < 6°C
Max. Hot water recommended	60 - 65 °C
Flow rate @ 3 bar ⁽²⁾	
Free Flow (mix)	27,5 l/min
D-Restrictor (mix)	22,4 l/min
Noise, 3 bar	< 20 dB (Group I)
Operation Torque (with water pressure)	
Open - close	Max. 0,4 - 0,55 N·m
Turn Left-Right	Max. 0,4 - 0,55 N·m
Saving Device (DUE) (C2)	Acc. to NF 077

Flow rate at MIX⁽²⁾

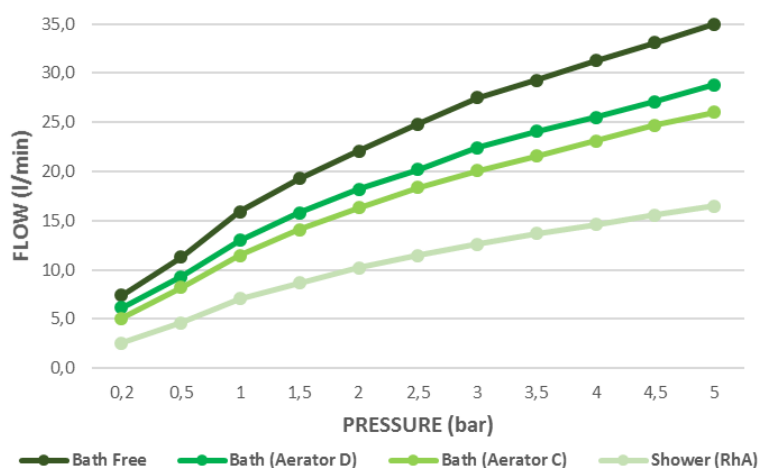

Sensitivity⁽²⁾

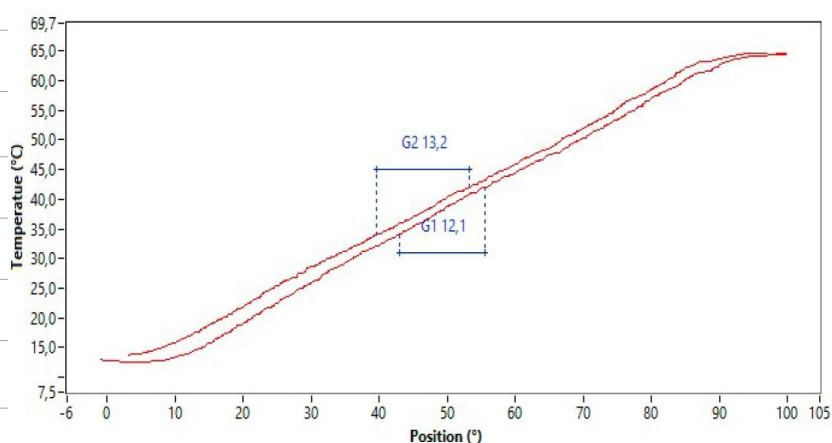

(1) The prescribed tightening torque is related to faucet body and nut both in brass material, pitch 1,5mm and no lubricant applied on the threads. For other faucet body - nut material combinations please contact SEDAL.

(2) Measured with SEDAL faucet.

