

EX-25 Piano

Single Lever Cartridge

Versions

08EX25L0007

Standard



Technical specifications

Prescribed tightening torque ⁽¹⁾	7 - 8 Nm
Opening angle	21°
Working pressure (recommended)	1 - 5 bar
Burst pressure	>35 bar
Life cycle	EN 817/NF077 U3 ASME GB 18145
	200.000 cycles 500.000 cycles 200.000 cycles
Noise acc. EN-817 (Basin Class Z, Shower Class A) ⁽¹⁾	Acoustic Group I <20 dB
Max. Hot water recommended	65°C


Flow rate @ 3 bar (2)

Free flow	23,1 l/min
B-Restrictor	14,1 l/min

Operation Torque

Open – close	0,08 - 0,20 Nm
--------------	----------------


Flow Rate ⁽²⁾

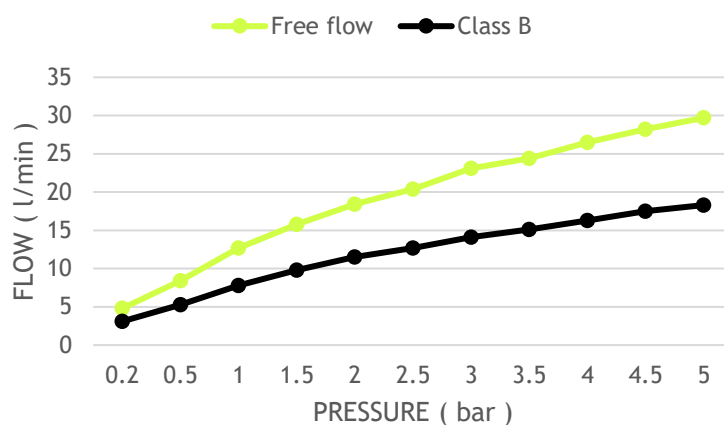


(1) The prescribed tightening torque is related to faucet body and nut both in brass material, pitch 1,25mm and no lubricant applied on the threads. For other faucet body – nut material combinations please contact SEDAL

(2) Measured with SEDAL faucet

Technical dimensions (3)

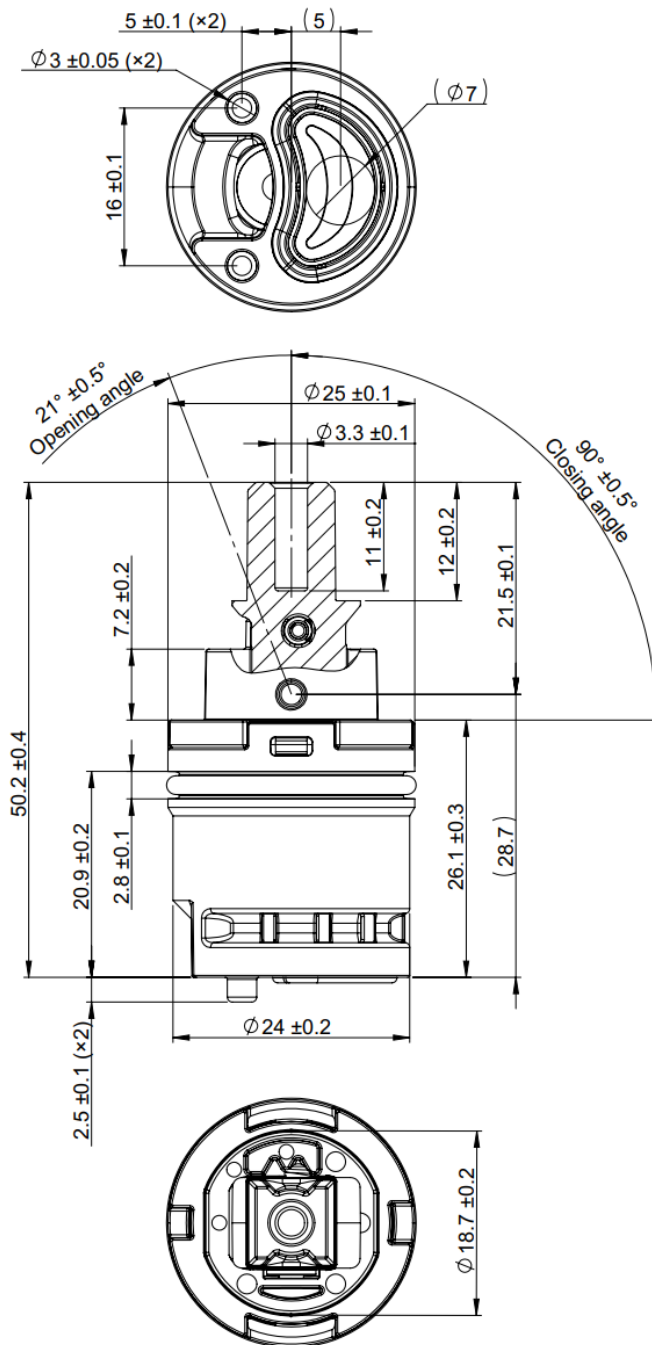

Machining tips (4)

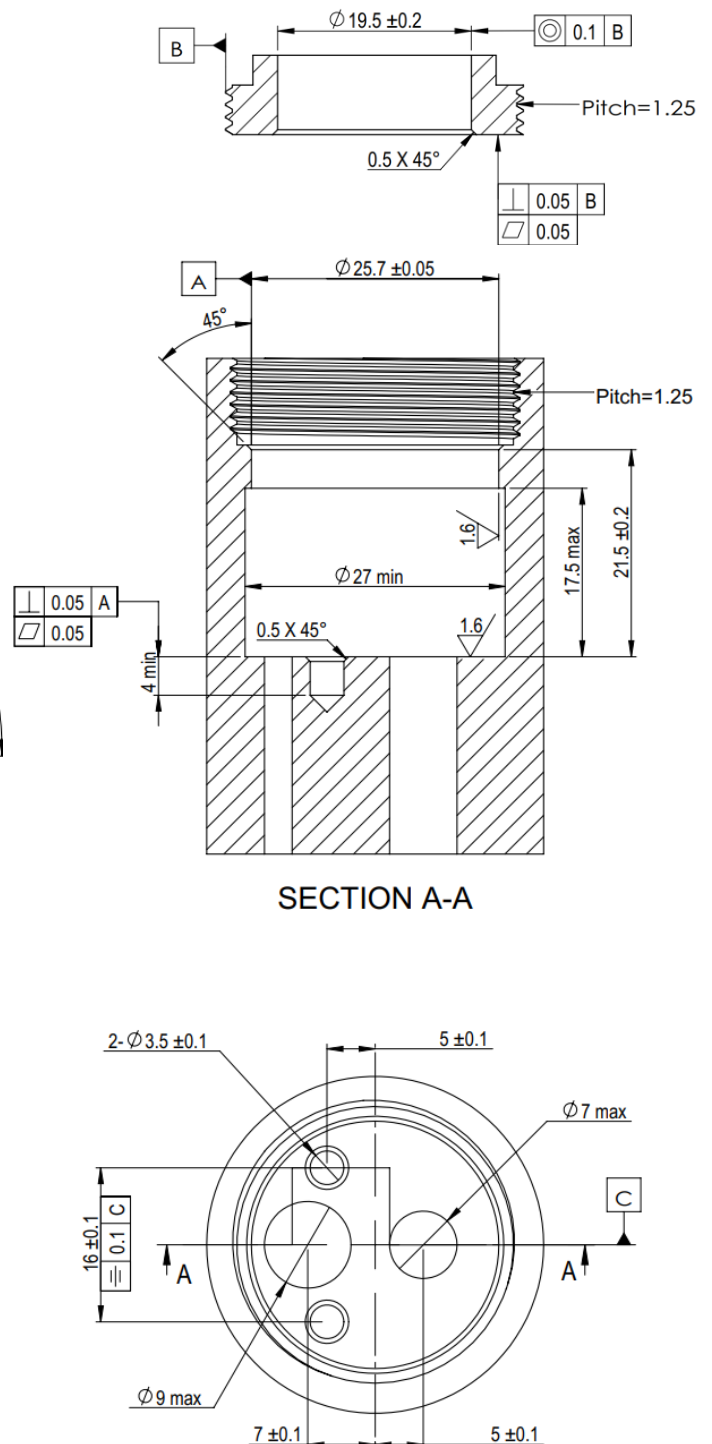

(3) Dimensions of the cartridge assembled into the faucet (without vertical gap between the cover and the base)

(4) Sealing surfaces must be free of burrs and sharp areas. The faucet body must be free of debris