


GD-25 S/D

Diverter single lever cartridge 25 mm

08GD25FAZ00




Technical specifications

Prescribed tightening torque ⁽¹⁾		7-8 N.m
Rotation angle		90°
Working pressure (recommended)		1 - 5 bar
Burst pressure		>35 bar
Life cycle	EN 817	70.000 cycles
	ASME 112.18.1 M	500.000 cycles
Max. Hot water		90 °C
Flow rate @ 3 bar⁽²⁾		
Free flow		16,2 l/min
Operation torque without water pressure		
Turn left-right		0,20 ÷ 0,40 Nm

Flow rate⁽²⁾

Free flow (DN8)

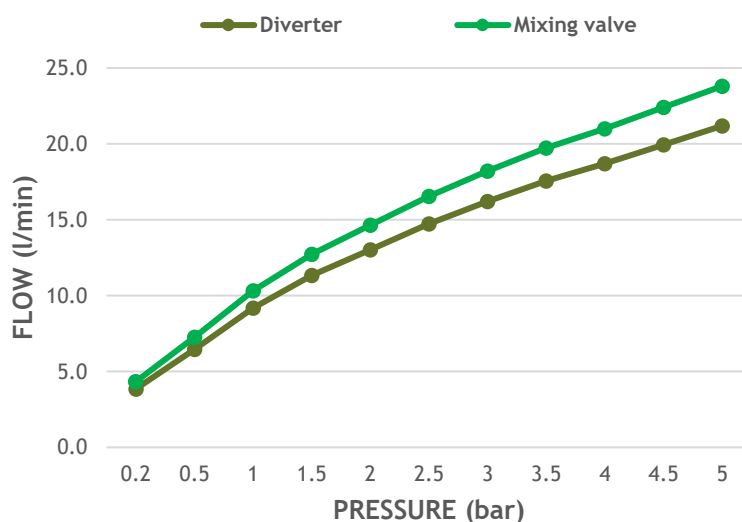


(1) The prescribed tightening torque is related to faucet body and nut both in brass material, pitch 1,25mm and no lubricant applied on the threads. For other faucet body - nut material combinations please contact SEDAL.



(2) Measured with SEDAL faucet.

Single lever cartridge
Diverter 25mm
DIVERTER
GD-25 S/D

Technical dimensions (3)

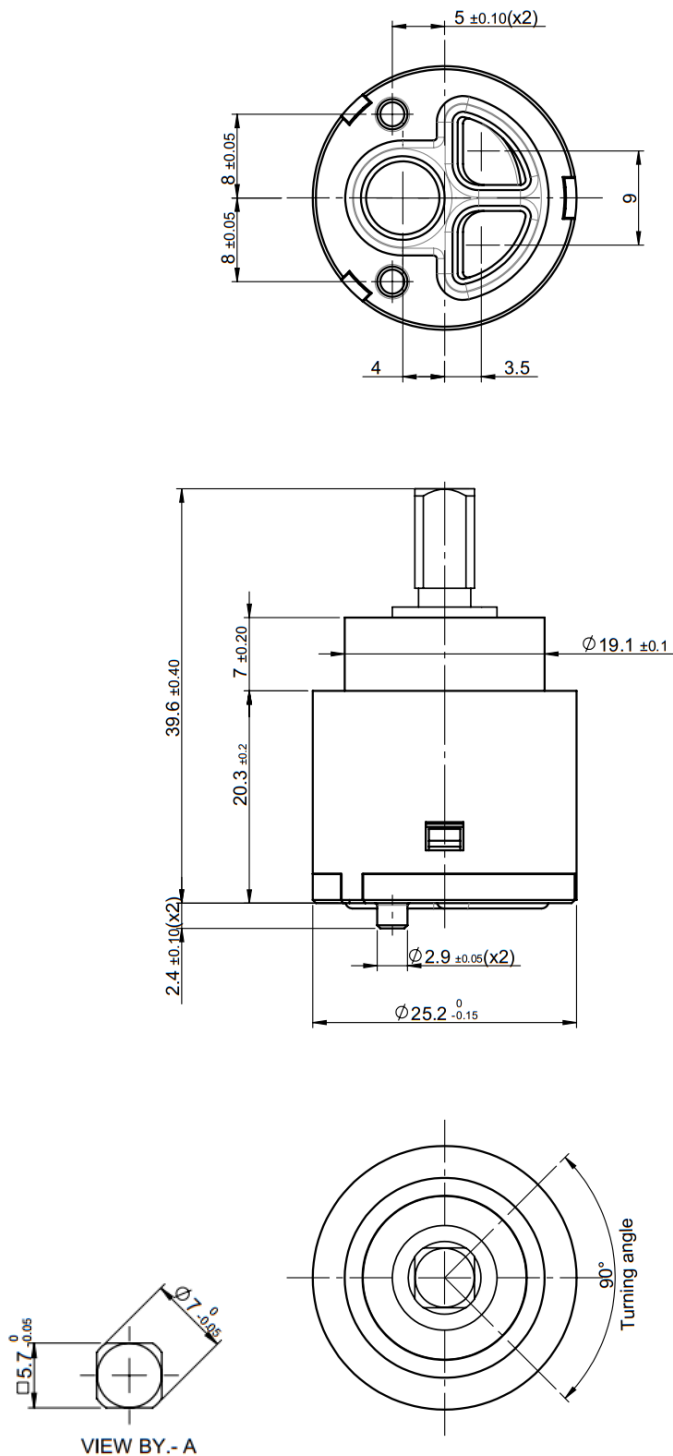

Machining prescription(4)

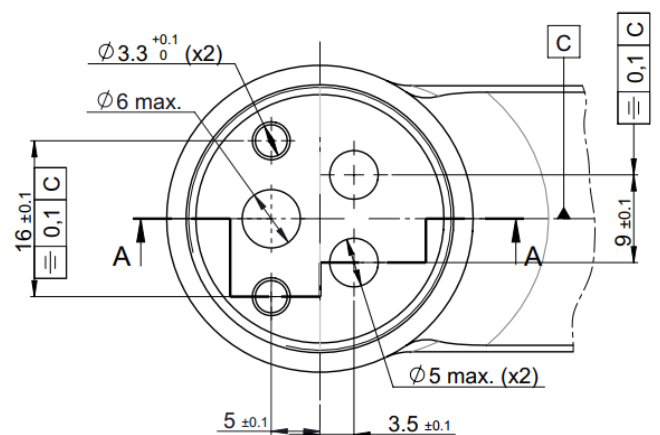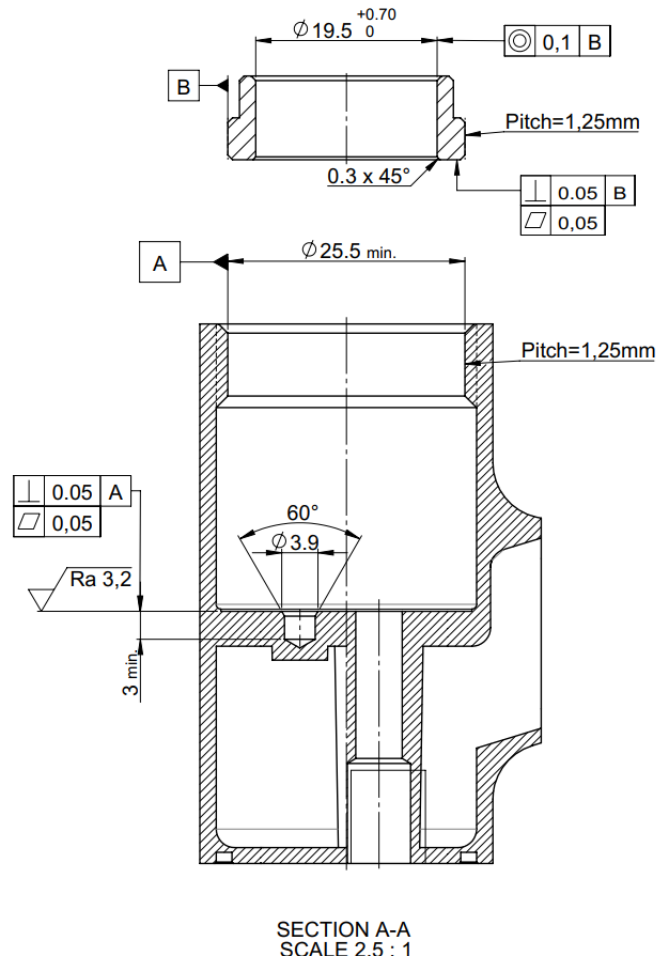

- (3) Dimensions of the cartridge assembled into the faucet (without vertical gap between the cover and the base)
(4) Sealing surfaces must be free of burrs and sharp areas. The faucet body must be free of debris