

BRASS DIVERTER CART. GD35 360°_6 Clicks


Single lever cartridge
Revolving 35mm / Share
08GD35S0019



Technical specifications

Prescribed tightening torque (1)	10 - 12 N.m
Rotation angle	360°
Share	Yes
Working pressure (recommended)	1 - 5 bar
Burst pressure	>35 bar
Life cycle	EN 817 ASME 112.18.1 M 30,000 cycles 15,000 cycles
Max. Hot water	90 °C
Flow rate @ 3 bar	
Free flow	26,4 l/min
Operation torque	
Turn left-right	0,10 ÷ 0,25 Nm
Click	0,30 ÷ 0,45 Nm

Flow rate at MIX⁽²⁾

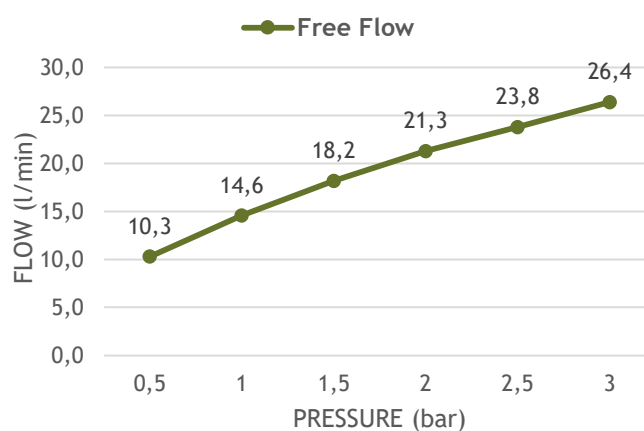


(1) The prescribed tightening torque is related to faucet body and nut both in brass material, pitch 1,5mm and no lubricant applied on the threads. For other faucet body - nut material combinations please contact SEDAL.

(2) Measured with SEDAL faucet.


Single lever cartridge revolving 35mm

GD-35 S/D

Technical dimensions ⁽³⁾

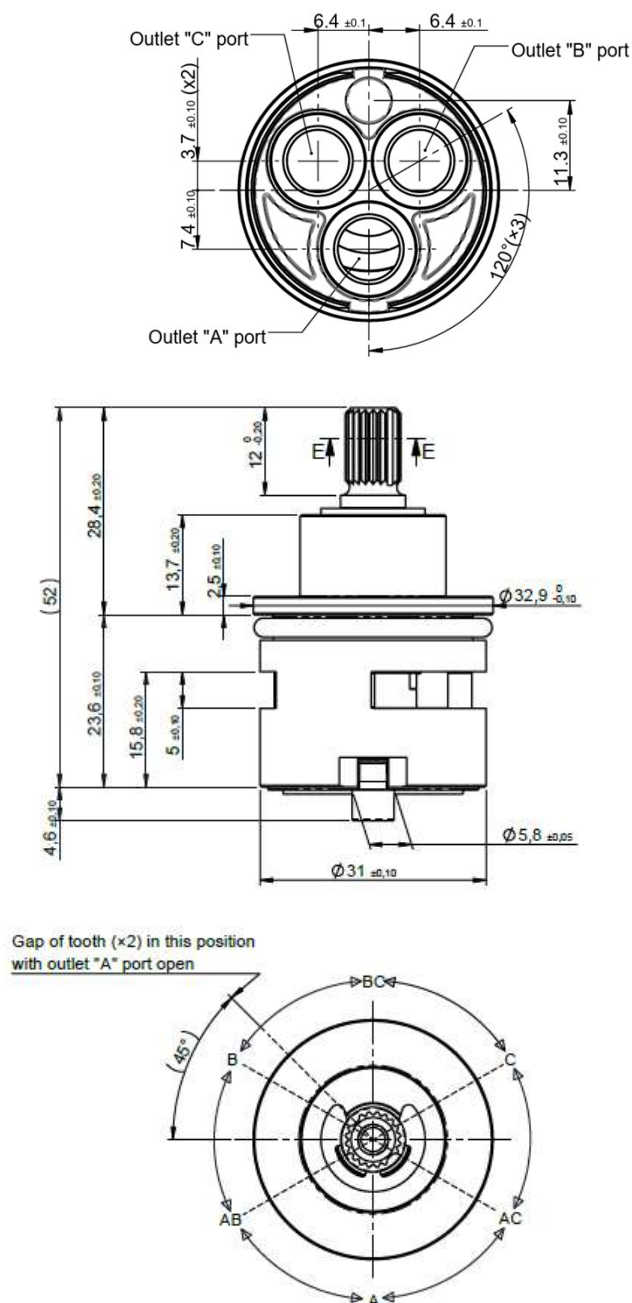

Machining prescription⁽⁴⁾

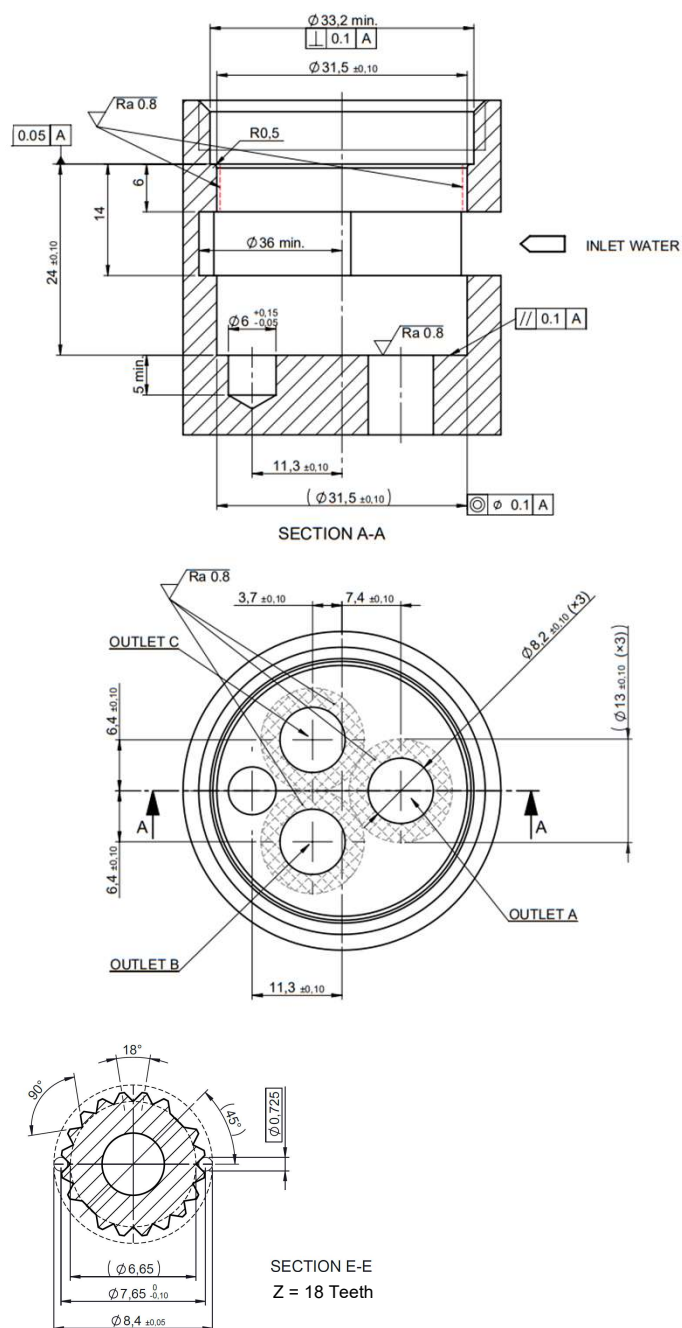

(3) Dimensions of the cartridge assembled into the faucet (without vertical gap between the cover and the base)

(4) Sealing surfaces must be free of burrs and sharp areas. The faucet body must be free of debris.