

SN-25 S/D HS

Single lever cartridge
Standard 25mm

08SN25S0016



Technical specifications

Prescribed tightening torque ⁽¹⁾	7 - 8 Nm
Opening angle	22,5°
Rotation angle	90°
Working pressure (recommended)	1 - 5 bar
Burst pressure	>35 bar
Life cycle 2xEN 817&GB18145	150.000 cycles
Sensitivity Shower ⁽²⁾ (R=68mm)	>12mm
Max. Hot water recommended	60 - 65 °C


Flow rate @1 bar (MIX) ⁽²⁾

Bath (Free flow)	11,0 l/min
Bath (RhB)	8,3 l/min

Operation torque @ 3 bar


Open - close	0,15 - 0,35 Nm
Turn at close	0,10 - 0,30 Nm
Turn at open	0,15 - 0,35 Nm

Flow rate at MIX ⁽²⁾

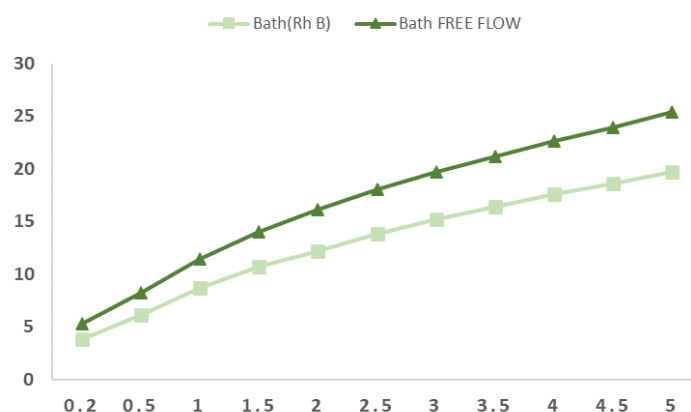

Sensitivity⁽²⁾


Shower: G1, G2 in mm with r=68mm

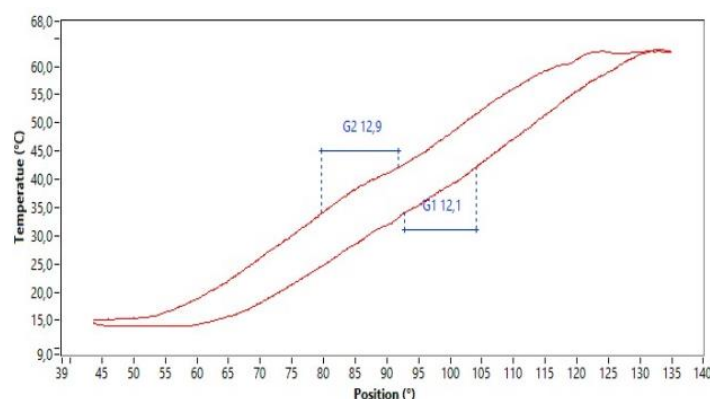


- (1) The prescribed tightening torque is related to faucet body and nut both in brass material, pitch 1,25mm and no lubricant applied on the threads. For other faucet body - nut material combinations please contact SEDAL.
- (2) Measured with SEDAL faucet.

Single lever cartridge
Standard 25mm
SN-25 S/D HS

Technical dimensions ⁽³⁾

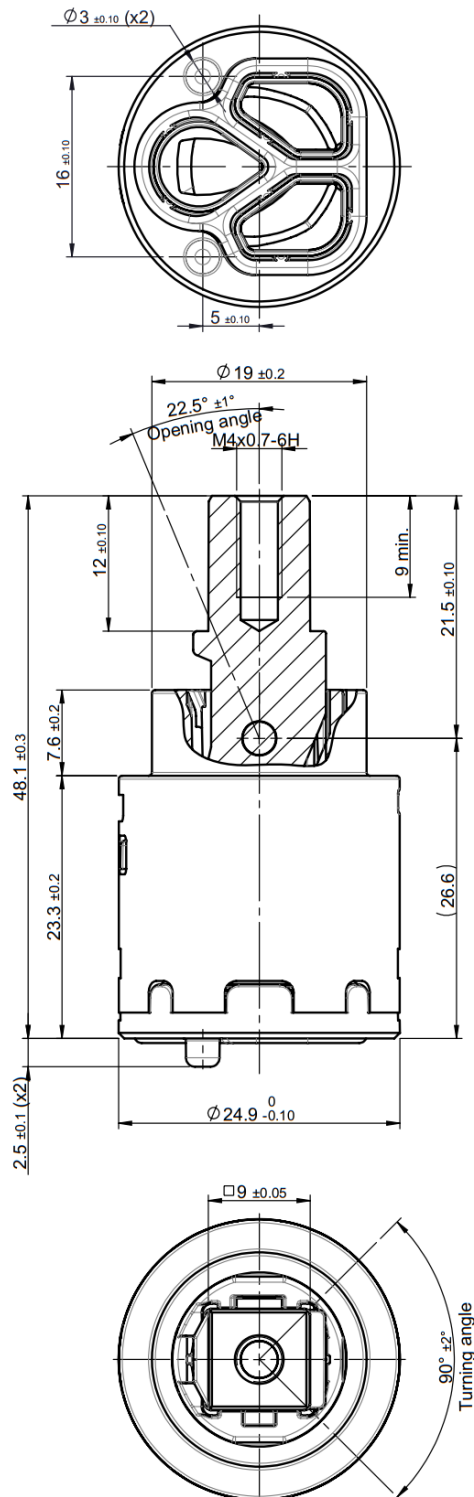

Machining prescription ⁽⁴⁾

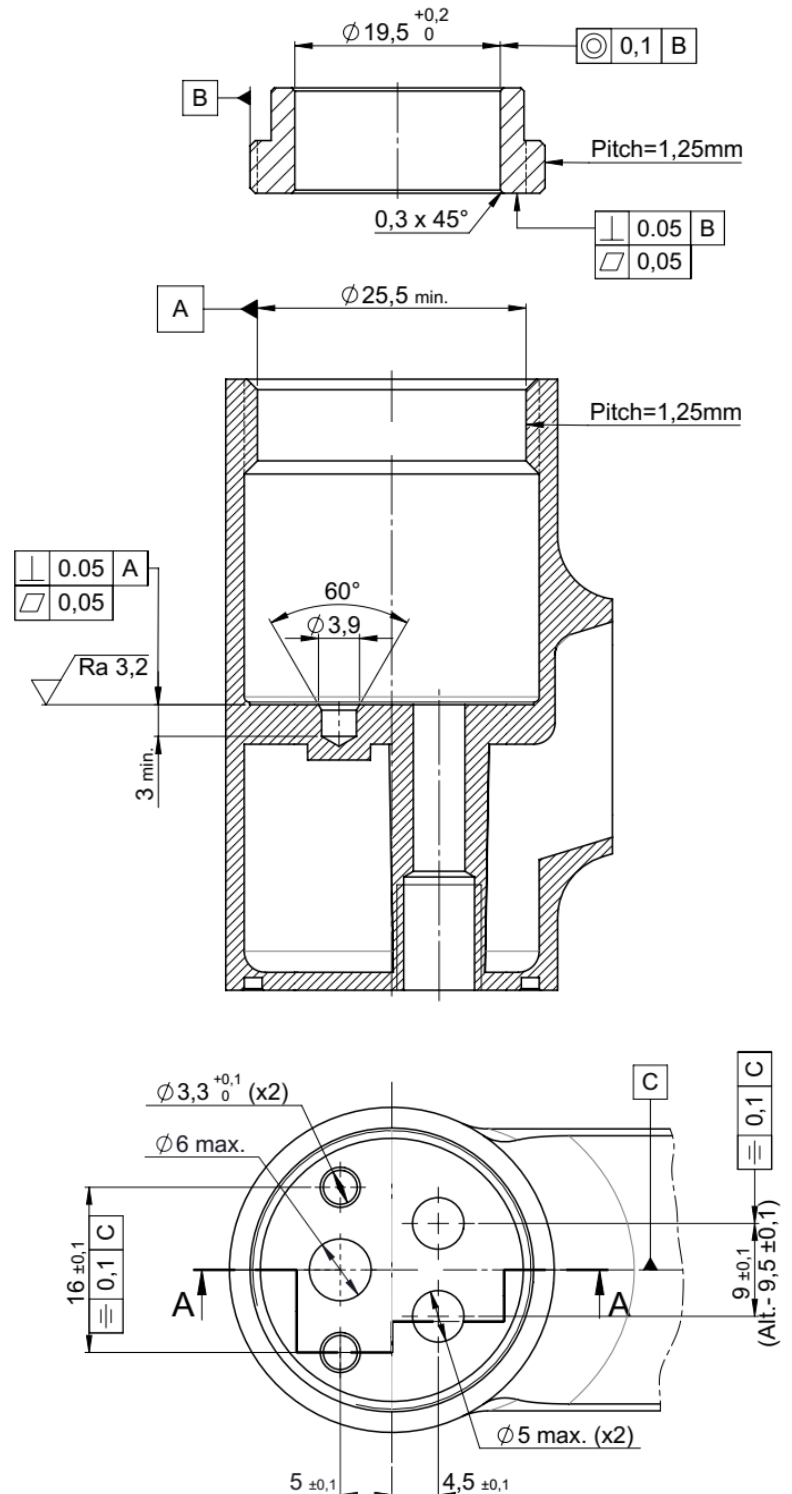

(3) Dimensions of the cartridge assembled into the faucet (without vertical gap between the cover and the base)

(4) Sealing surfaces must be free of burrs and sharp areas. The faucet body must be free of debris