


Brass headwork Ceramic HW 180° **19MC05** (Left to close)



Technical specifications (*)

Assembly torque	10 - 12 Nm
Rotation angle	180°
Working pressure (recommended)	1 - 5 bar
Pressure resistance - ASME A112	35 bar
Burst pressure	>50 bar
Life cycle - EN 200	200.000 cycles
Life cycle - ASME A112	500.000 cycles
Max. Hot water	90 °C
Max. Hot water ecomended	65 °C
Flow rate at 3 bar (free flow)	17,6 l/min
Turn left - right	0.100 - 0.200 Nm
Material	Brass

Flow rate curve

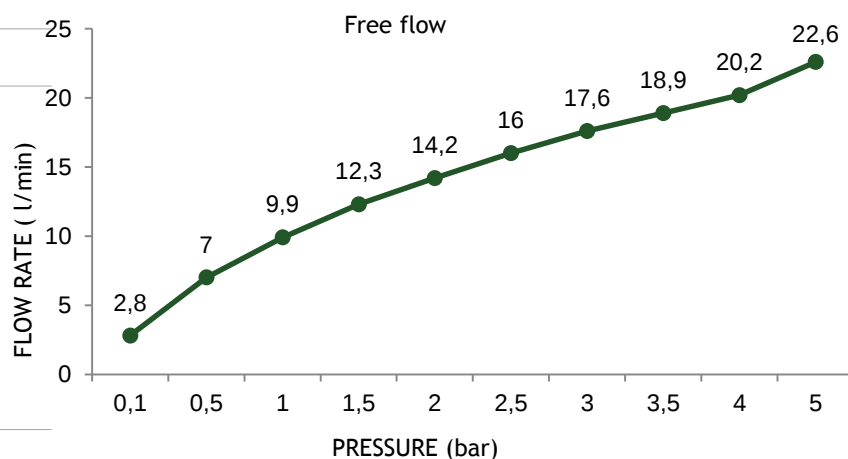

(*) Measured with Sedal's faucet

Technical dimensions

