


Ceramic HW 90° HF

19MC090L97


(Left to close)

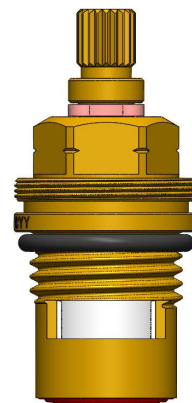

Technical specifications (*)

Assembly torque	10 - 12 Nm
Rotation angle	90°
Working pressure (recommended)	1 - 5 bar
Pressure resistance - EN 200	>25 bar
Burst pressure	>50 bar
Hammer test	8-50 bar (200 cycles)
Life cycle - ASME / NF077 U3 (EN 200)	500.000 cycles
Max. Hot water	90 °C
Max. Hot water recommended	65 °C
Flow rate at 3 bar (free flow)	56,5 l/min
Turn left - right	< 0.1 Nm
Material	Brass


Flow rate curve

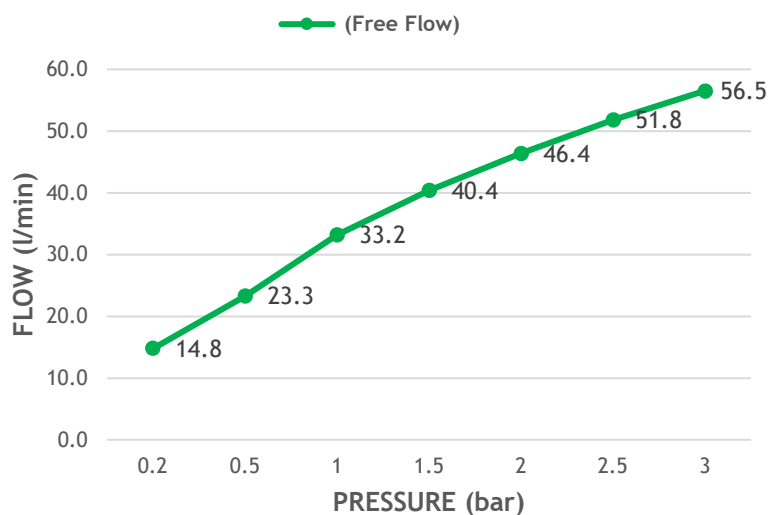

(*) Measured with Sedal's faucet

Headwork
19MC090L97

Technical dimensions


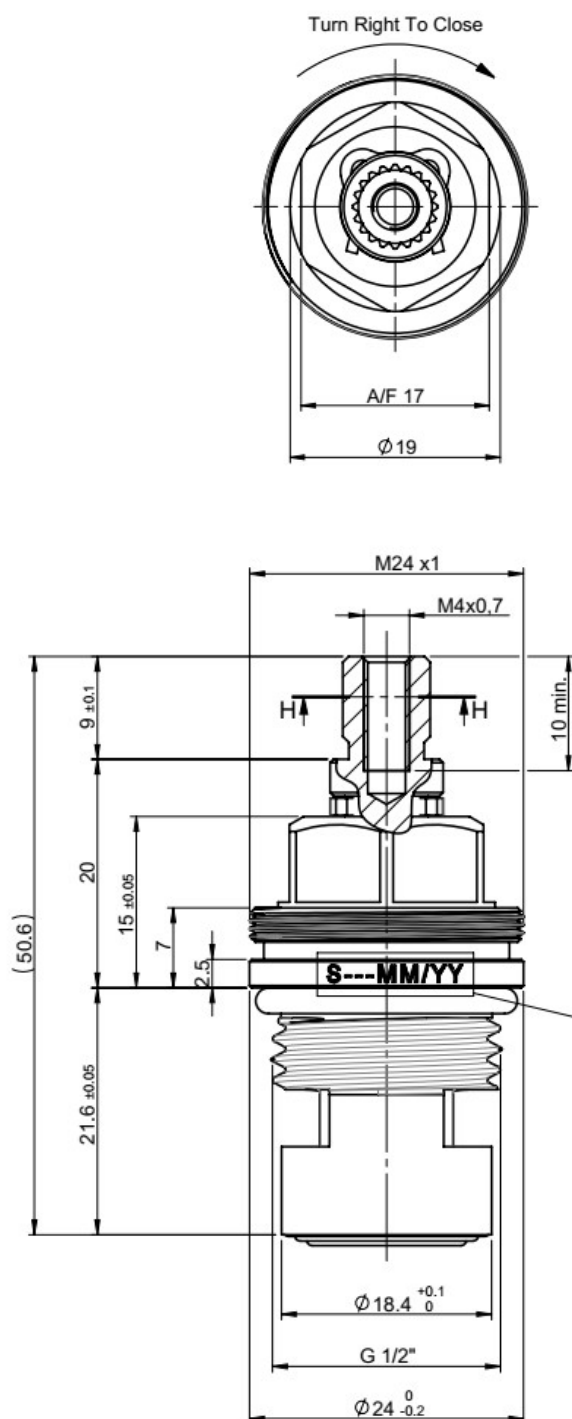


S---MM/YY

Marking.
(MM = Month / YY = Year)

DETAIL I
SCALE 4 : 1

Machining tips

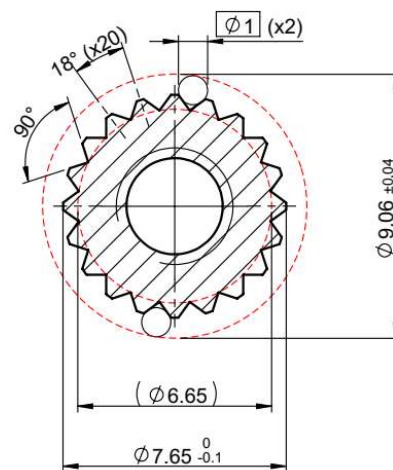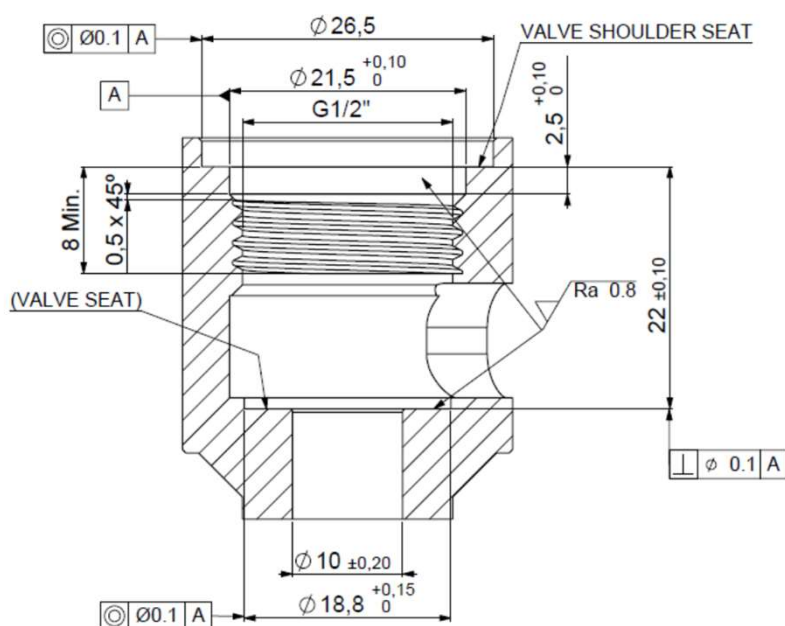

SECTION F-F
SCALE 5 : 1
Milling DETAIL 20 Teeth