



STAINLESS STEEL HEADWORK CERAMIC HW 90° **19MC090R103** (RIGHT TO CLOSE)

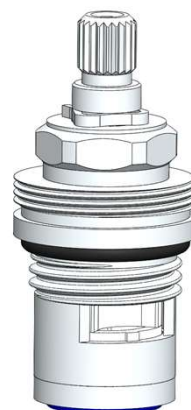

Technical specifications (*)

Assembly torque	10 - 12 Nm
Rotation angle	90°
Working pressure (recommended)	1 - 5 bar
Pressure resistance - ASME A112	35 bar
Burst pressure	>50 bar
Life cycle - EN 200	200.000 cycles
Life cycle - ASME A112	500.000 cycles
Max. Hot water	90 °C
Max. Hot water recommended	65 °C
Flow rate at 3 bar (free flow)	23,9 l/min
Turn left - right	0.100 - 0.200 Nm
Material	STAINLESS STEEL

Flow rate curve

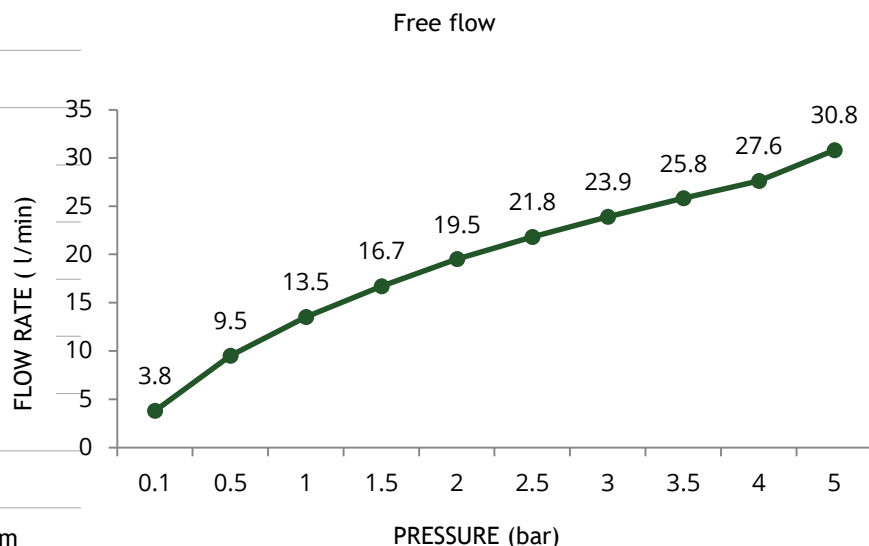


(*) Measured with Sedal's faucet


STAINLESS STEEL
HEADWORK

19MC090R103



Technical dimensions

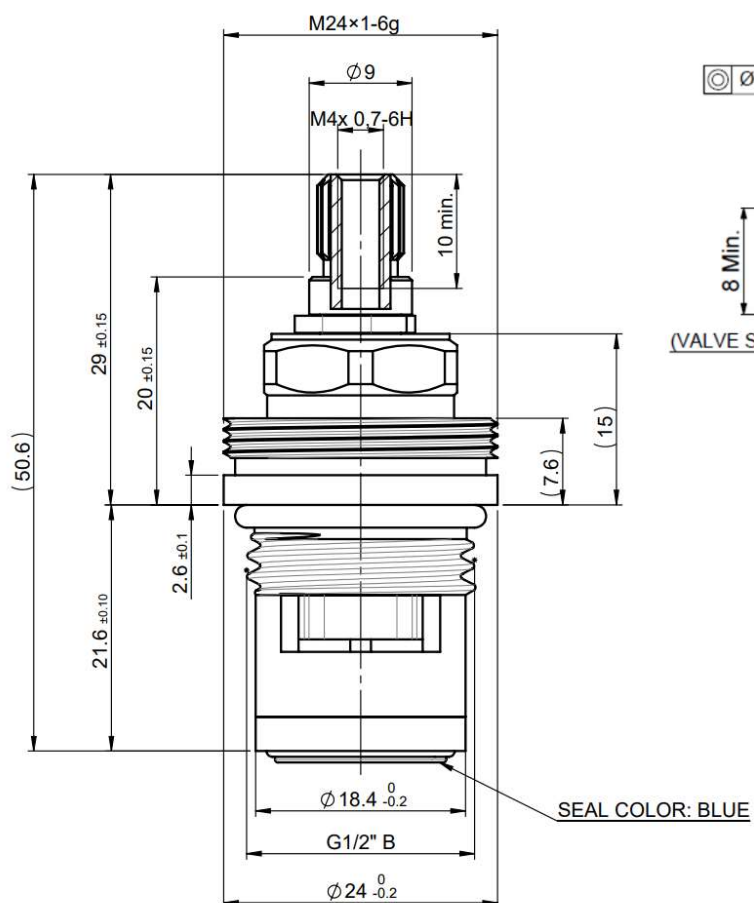

Machining tips

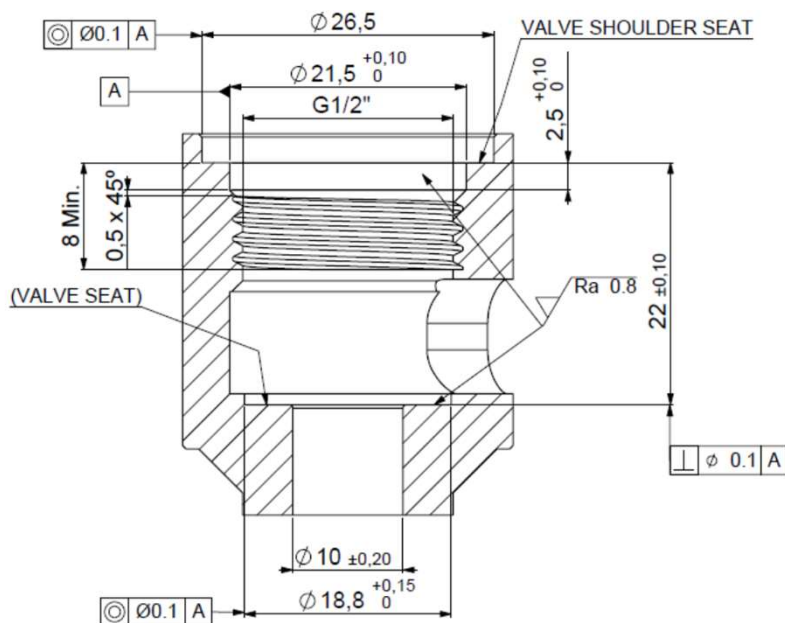

Turn right to closing direction

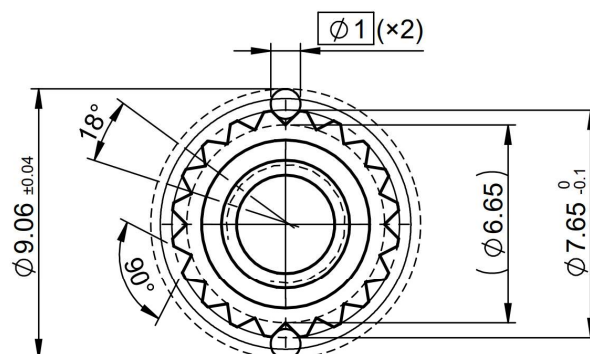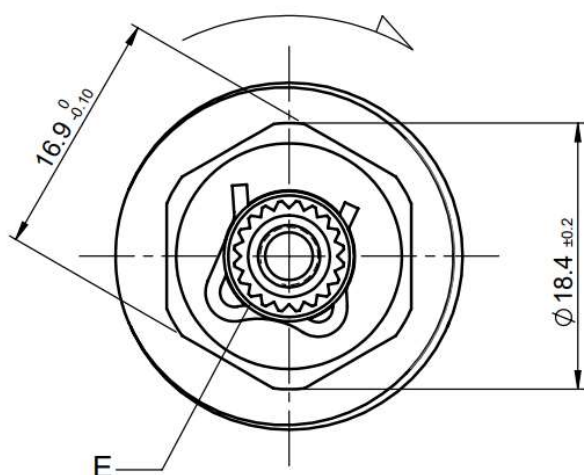

E-E: Milling detail
20 teeth
SCALE 4 : 1