

Ceramic HW ¾" 90° RTC

19MC090R64


(Right to close)



Technical specifications (*)

Assembly torque	10 - 12 Nm
Rotation angle	90°
Working pressure (recommended)	1 - 5 bar
Pressure resistance - ASME A112	35 bar
Burst pressure	>50 bar
Life cycle - EN 200	200.000 cycles
Life cycle - ASME A112	500.000 cycles
Max. Hot water	90 °C
Max. Hot water recommended	65 °C
Flow rate at 3 bar (free flow)	25,9 l/min
Turn left - right	0.100 - 0.200 Nm
Material	BRASS



Flow rate curve

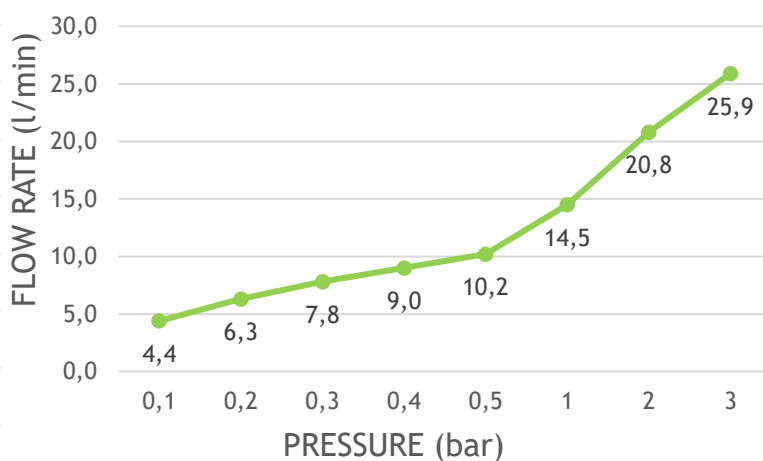

(*) Measured with Sedal's faucet

Inox headwork
19MC090R64

Technical dimensions

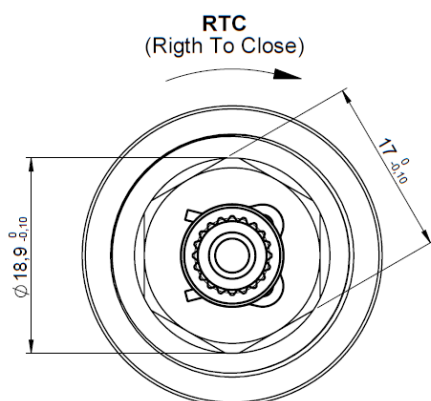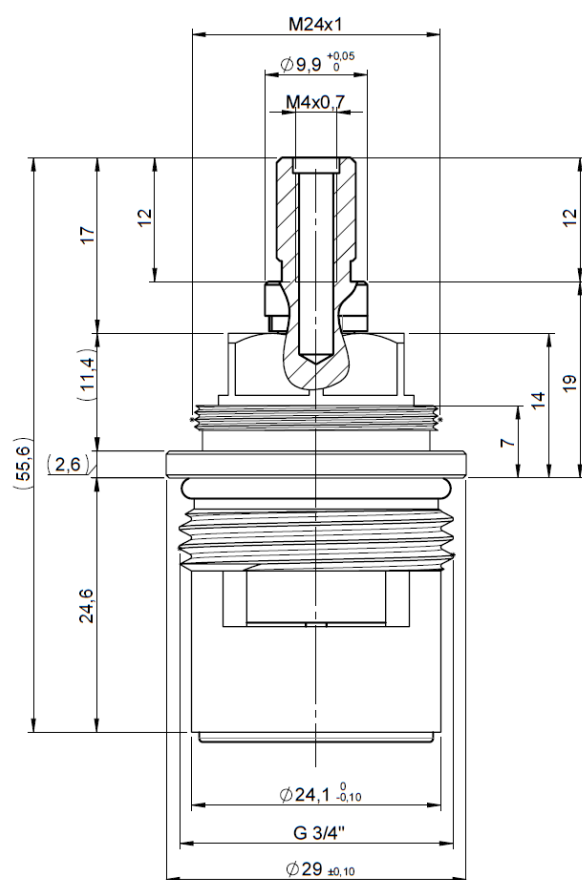

Machining tips

