

Plastic body headwork

180°

19MCP18R01

(Right to close)




Technical specifications (*)

Assembly torque	8 - 10 Nm
Rotation angle	180°
Working pressure (recommended)	1 - 5 bar
Pressure resistance - ASME A112	35 bar
Burst pressure	>50 bar
Life cycle - EN 200	200.000 cycles
Life cycle - ASME A112	500.000 cycles
Max. Hot water	90 °C
Max. Hot water recommended	65° C
Flow rate at 3 bar (free flow)	23,3 l/min
Turn left - right	0.100 - 0.200 Nm

Flow rate curve 180°

Free flow

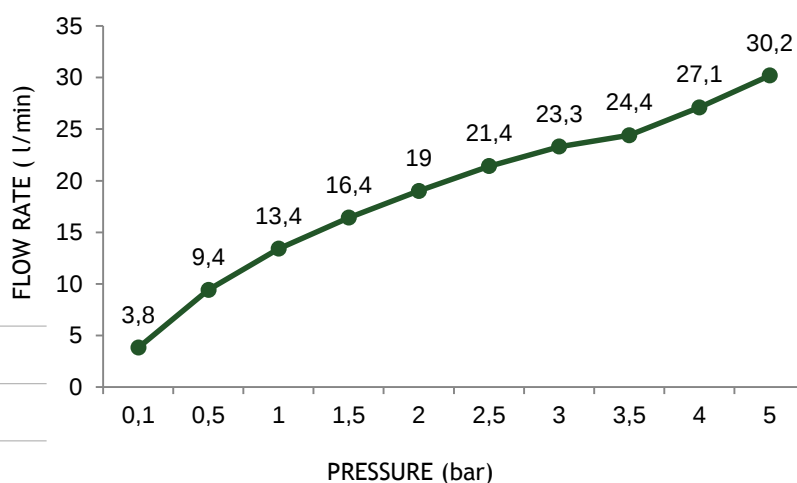


(*) Measured with Sedal's faucet

Plastic body
headwork

19MCP18R01

Technical dimensions

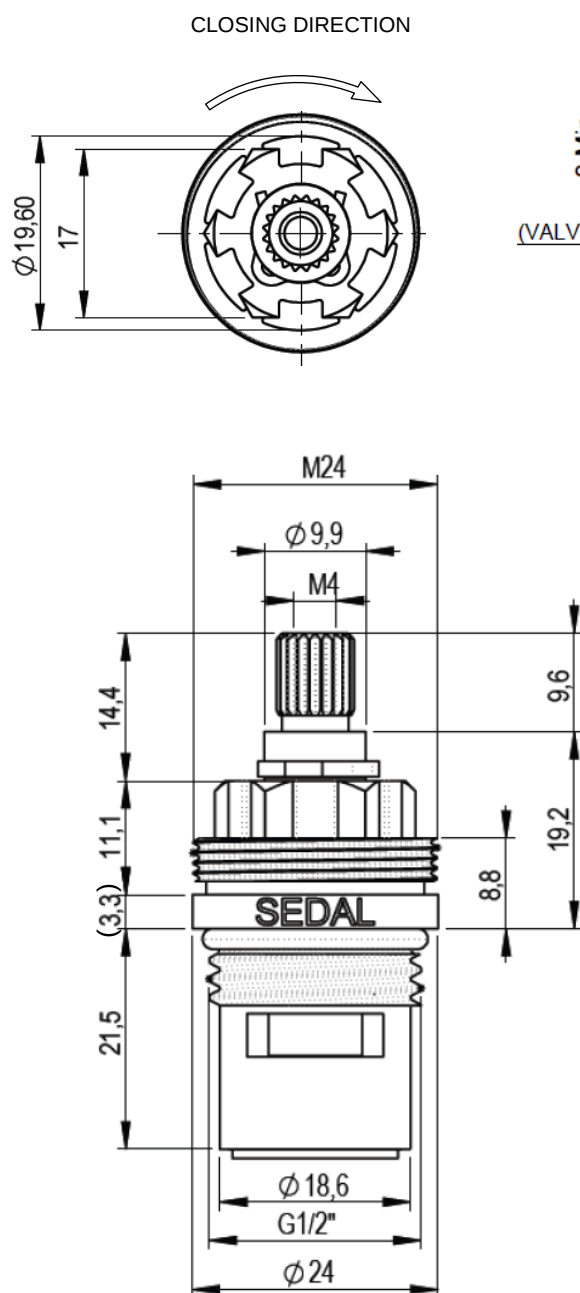

Machining tips

