

BRASS HEADWORKS CONVENTIONAL

19MN01


(Right to close)



Technical specifications (*)

Assembly torque	10 - 12 Nm	40
Working pressure (recommended)	1 - 5 bar	35
Pressure resistance - ASME A112	35 bar	30
Burst pressure	>50 bar	25
Life cycle - EN 200	200.000 cycles	20
Life cycle - ASME A112	500.000 cycles	15
Max. Hot water	90 °C	10
Max. Hot water recommended	65 °C	5
Flow rate at 3 bar (free flow)	29 l/min	
Turn left - right	0.100 - 0.200 Nm	
Material	Brass	

Flow rate curve

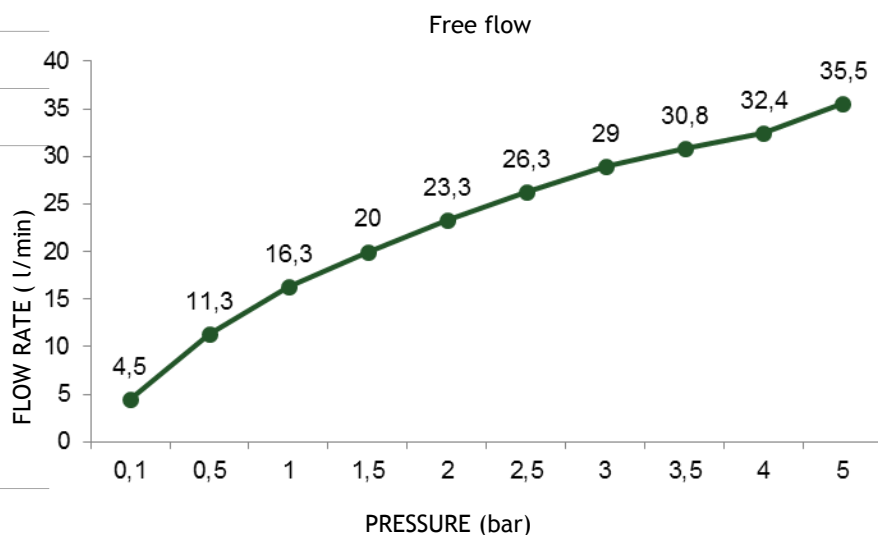


(*) Measured with Sedal's faucet

BRASS HEADWORKS

CONVENTIONAL

Technical dimensions

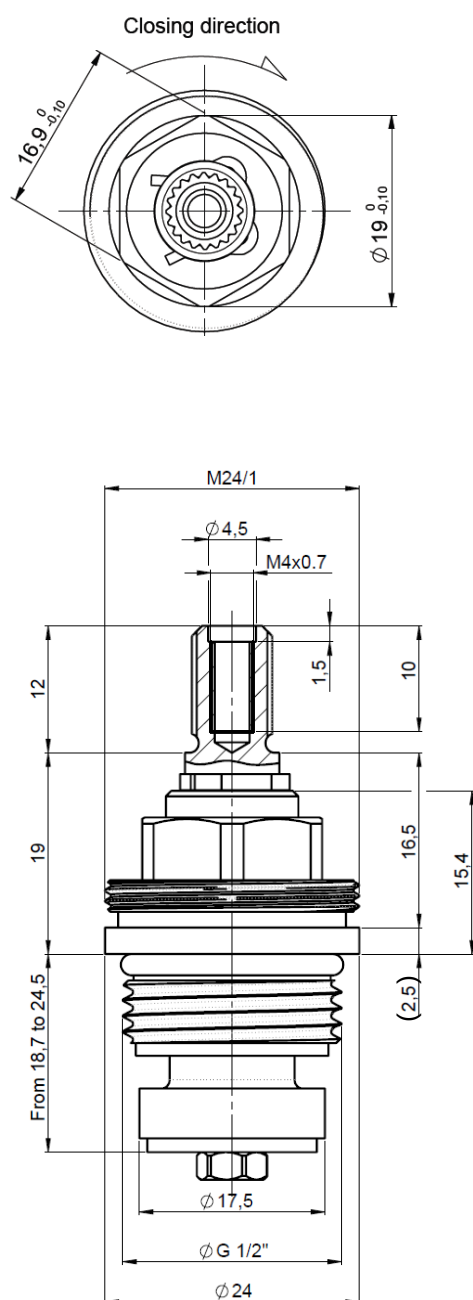

Machining tips

