


SELF-CLOSING VALVE M28 SELF-CLEANING - BASIN


19MTB0C05 (blue dot)
19MTB0H05 (red dot)

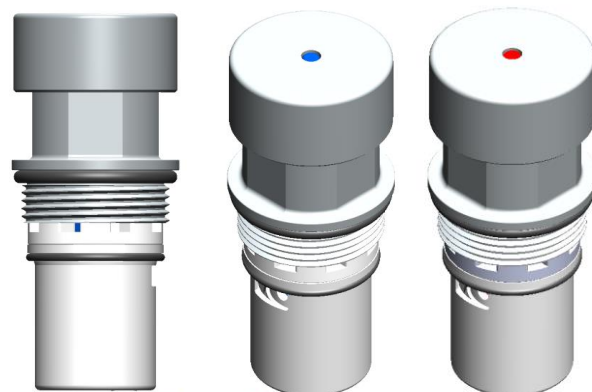

Technical specifications

Working pressure (recommended)	1-5 bar
Burst pressure	>25 bar
Life test acc. EN 816	210,000 cycles
Recommended water temperature	<40°C
Flow rate at 3 bar (DN13) ⁽¹⁾	
Free flow ⁽¹⁾	17 l/min
Restrictor class C ⁽¹⁾	14,5 l/min
Duration of flow at 3 bar ⁽¹⁾ , after 500 cycles acc. to EN-816.	15 ± 5 s

Free flow

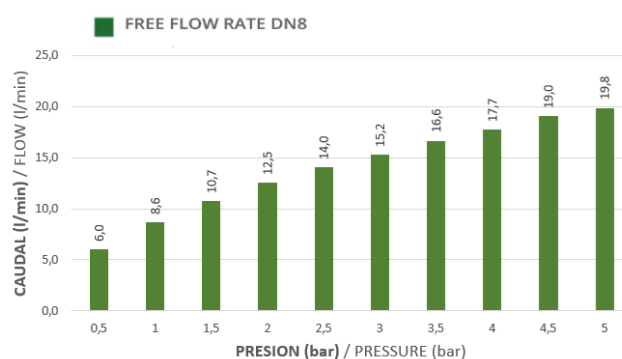


(1) Measured with SEDAL faucet, with vessel position at maximum flow.


Self-closing valve M28
Self-cleaning - Basin

19MTB0C05
19MTB0H05

Technical dimensions

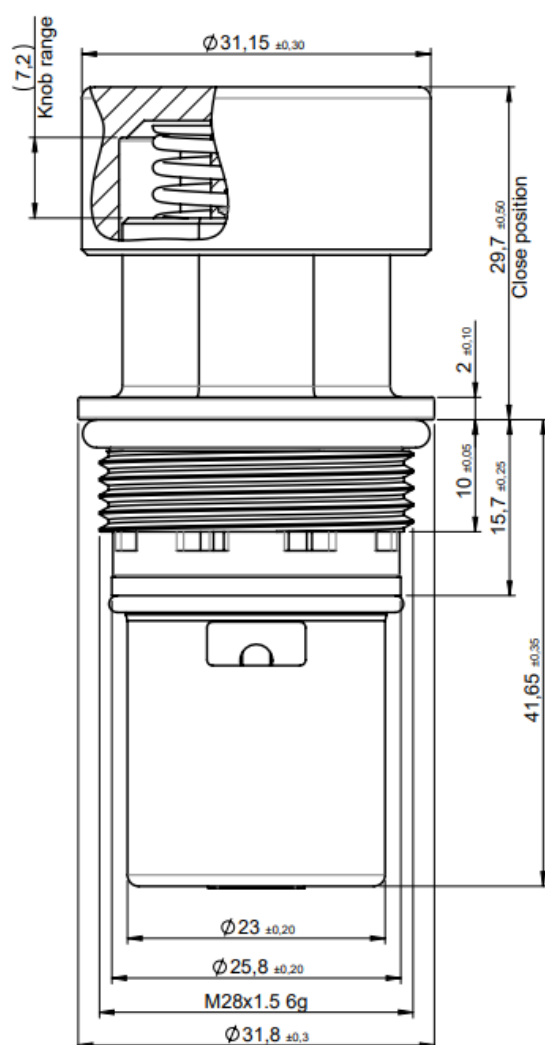

Machining prescription⁽³⁾

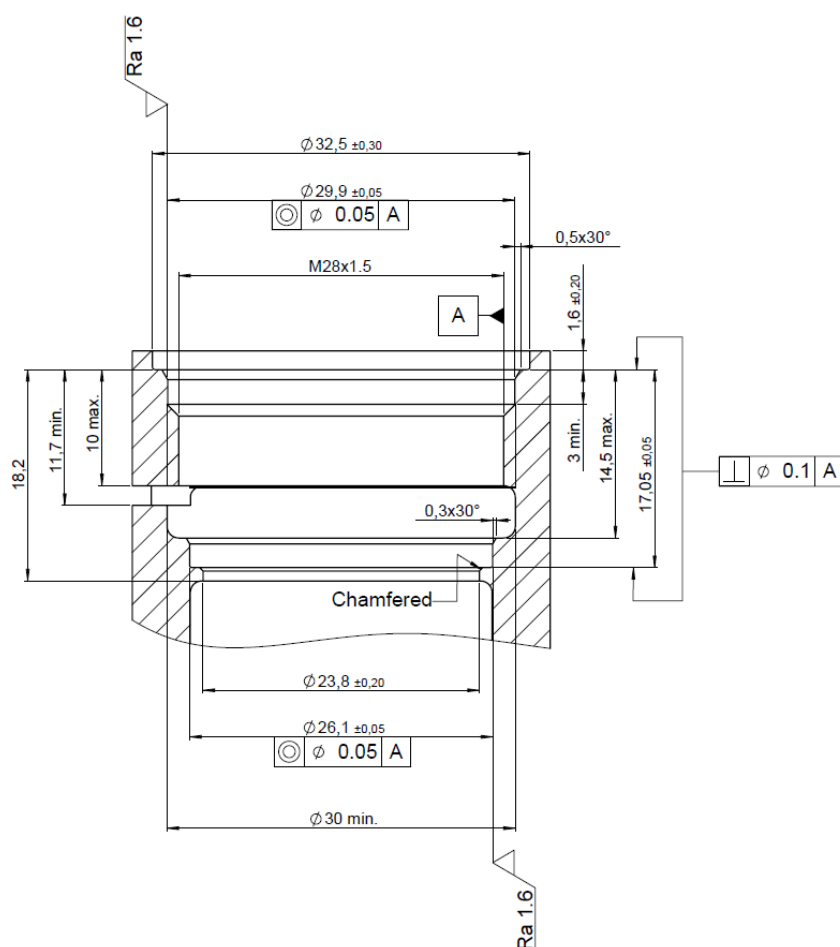

⁽³⁾ A filter must be installed inside the faucet, upstream the valve