


SELF-CLOSING VALVE M26 SELF-CLEANING

19MTB0C06 (Basin blue dot)

19MTB0H06 (Basin red dot)


19MTU0C06 (Urinal blue dot)

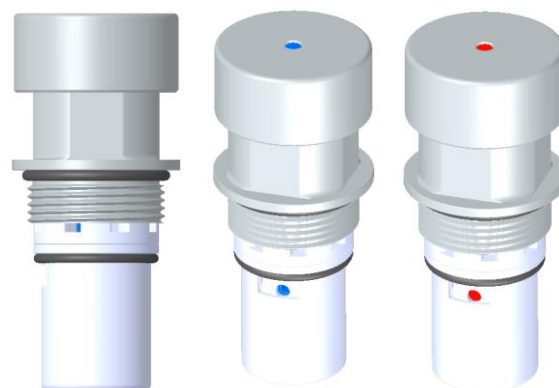

Technical specifications


Working pressure (recommended)	1-5 bar
Burst pressure	>25 bar
Life test resistance	210,000 cycles
Recommended water temperature	<40°C
Flow rate at 3 bar (DN8) ⁽¹⁾	
Free flow ⁽¹⁾	14,8 l/min
Restrictor class A ⁽¹⁾	10,2 l/min
Duration of flow at 3 bar after 500 cycles ⁽¹⁾	
19MTB0*06 (Basin)	8 ± 2 s
19MTU0C06 (Urinal)	3 ± 1 s

Free flow

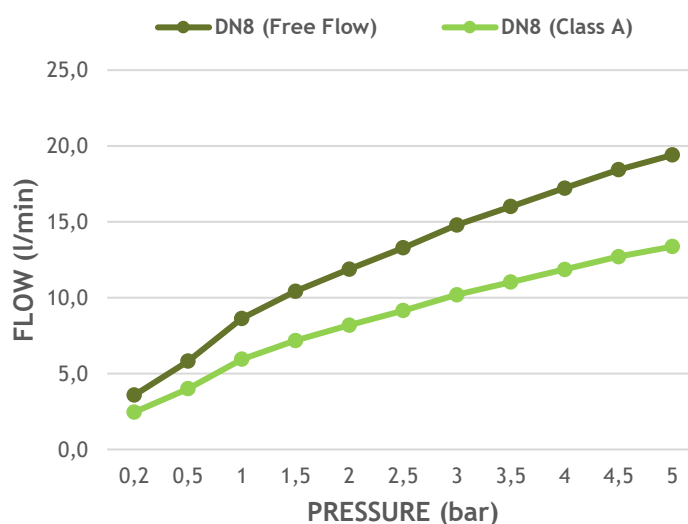

(1) Measured with SEDAL faucet, with vessel position at maximum flow.

Machining prescription⁽²⁾

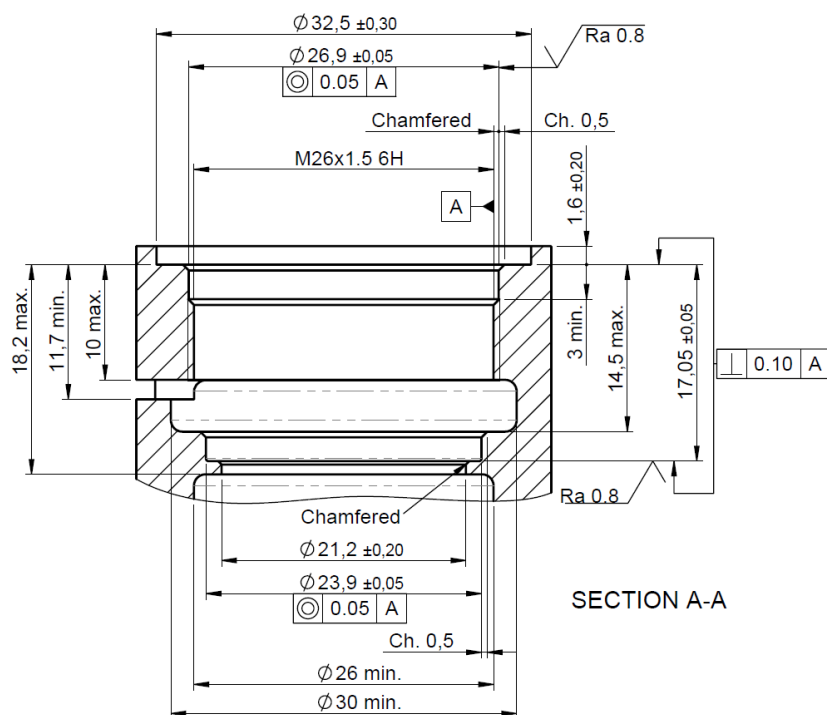

⁽²⁾ A filter must be installed inside the faucet, upstream the valve